



2013 Ver.1
 2014 Ver.2
 2015 Ver.3
 2016 Ver.4



PNEUMATIC TOOL




PRONA AIR TOOL MANUFACTURING LIMITED



Company Profile

PRONAAIR TOOL MANUFACTURING CO. LTD. is a professional manufacturer of pneumatic tools which gathers design, development, production and sales. We provide customers with a variety of professional pneumatic tools, our products applies to automotive industry, shipbuilding industry, furniture manufacturing, housing decoration and architecture, and so on. Diverse and complete product range, including: nail guns, wrenches, screwdrivers, polishing machines, as well as a variety of pneumatic tool accessories, etc., with product quality assurance, our product marketing network is throughout all over the country and the world, and our products are welcomed by customers and in their favor. Our company has an experienced R&D team, strict quality management system, using advanced imported machinery processing, testing equipment and precise processing technology, and has passed the ISO quality system certification and CE safety certification, is a professional pneumatic tool production expert.

The company continues to strive for a purpose of "excellence, customer first, quality in advance", providing high quality service and products for our customers. Our company carries on high quality, technological innovation, talent management as the basis to build the strong brand.

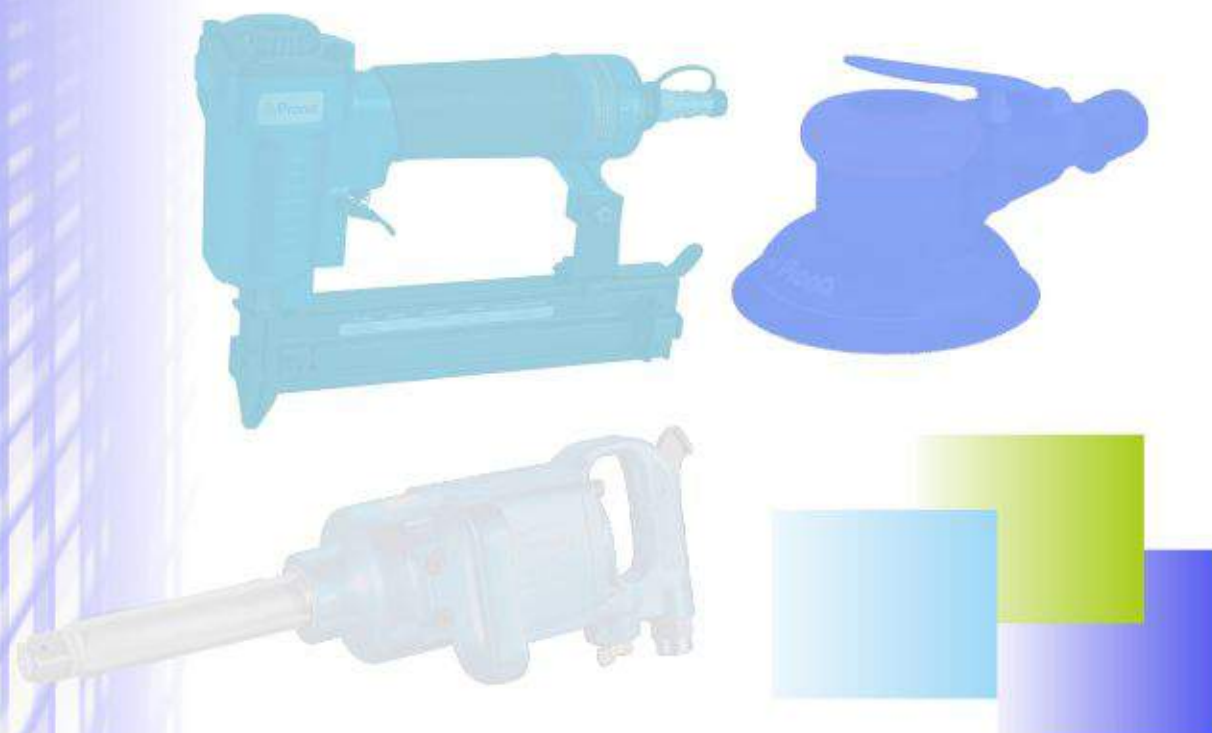

Product

Summary

● Company Profile -----	1
● Product Summary -----	2
● Ratchet Wrench -----	3
● Impact Wrenches -----	5
● Straight Shape Screwdriver -----	13
● 90° Screwdriver / Pistol Shape Screwdriver -----	15
● Orbital Sander -----	16
● Die Grinder -----	21
● Bench Grinder -----	24
● Bench Grinder/ Grinder -----	25
● Grinder / Finishing Sander -----	26
● Air Saw -----	27
● Air Hammer -----	28
● Engraving Pen/Air Nibbler -----	29
● Pistol Drill -----	32
● Top Carton Closing Stapler -----	34
● Rivet Gun -----	35
● Pull Nut Nail Gun -----	36
● Finish Nailer -----	37
● Angle Framing Nailer -----	38
● Composite Finish Nailer -----	39
● Coil Nailer -----	42
● Emery Paper/Nail/Accessories -----	45
● SB-K Series -----	47
● Spring Balancer -----	48
● Bit -----	49



RP-3102A Ratchet Wrenches

- Max Torque : 34 N.M (25 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 128.3 mm (5")



RP-3226 Ratchet Wrenches

- Max Torque : 42 N.M (31 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 165 mm (6 1/2")



RP-3002A Ratchet Wrenches

- Max Torque : 34 N.M (25 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 128.3 mm (5")



RP-3228 Ratchet Wrenches

- Max Torque : 70 N.M (50 ft-lbs)
- Bolt Diameter : 13 mm (1/2")
- Length : 227 mm (9")



RP-3107A1 Ratchet Wrenches

- Max Torque : 95 N.M (70 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 293 mm (11 1/2")



RP-3107B1 Ratchet Wrenches

- Max Torque : 95 N.M (70 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 306 mm (12")



RP-3207A1 Ratchet Wrenches

- Max Torque : 95 N.M (70 ft-lbs)
- Bolt Diameter : 13 mm (1/2")
- Length : 293 mm (11 1/2")



RP-3207B1 Ratchet Wrenches

- Max Torque : 95 N.M (70 ft-lbs)
- Bolt Diameter : 10 mm (3/8")
- Length : 306 mm (12")



RP-73 Ratchet Wrenches

- Max Torque : 70 N.M (50 ft-lbs)
- Bolt Diameter : 9 mm (3/8")
- Length : 254 mm (10")



MADE IN JAPAN

RP-74 Ratchet Wrenches

- Max Torque : 70 N.M (52 ft-lbs)
- Bolt Diameter : 9 mm (3/8")
- Length : 254 mm (10")



MADE IN JAPAN

Model	Square Drive		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm		RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg
RP-3102A	3/8	10	300	34	25	6.3	90	128.3	5	51	2	0.49	1.08
RP-3226	3/8	10	230	42	31	6.3	90	165	6 1/2	71	3	0.50	1.1
RP-3107A1	3/8	10	160	95	70	6.3	90	293	11 1/2	73.6	3	1.26	2.78
RP-3107B1	3/8	10	160	95	70	6.3	90	306	12	71.4	3	1.30	2.87
RP-73	3/8	9	150	70	50	6.3	90	254	10	210	7	1.20	2.65

Model	Square Drive		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm		RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg
RP-3002A	1/4	10	300	34	25	6.3	90	128.3	5	51	2	0.49	1.08
RP-3228	1/2	13	170	70	50	6.3	90	227	9	71	3	1.17	2.58
RP-3207A1	1/2	13	160	95	70	6.3	90	293	11 1/2	73.6	3	1.26	2.78
RP-3207B1	1/2	10	160	95	70	6.3	90	306	12	71.4	3	1.30	2.87
RP-74	1/2	9	150	70	50	6.3	90	254	10	210	7	1.20	2.65



RP-105A Impact Wrenches

- Structure : Hydraulic impulse type
- Max Torque : 35 N.M (26 ft-lbs)
- Length : 139 mm (5 1/2")



Model	Square Drive		Bolt Diameter		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm	in	mm	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-105A	3/8	8	5/16	8	6100	22-35	16-26	6.3	90	139	5 1/2	68	2	0.84	1.85
RP-106A	3/8	8	5/16	8	6700	32-50	24-37	6.3	90	139	5 1/2	90.7	3	0.84	1.85
RP-107A	3/8	8	5/16	8	5400	40-85	30-63	6.3	90	151	6	103	4	0.95	2.09

RP-P6 Impact Wrenches

- Max Torque : 200 N.M (150 ft-lbs)
- Length : 142 mm (5 5/8")



MADE IN JAPAN

RC-6LSB Impact Wrenches

- Max Torque : 36 N.M (30 ft-lbs)
- Length : 180 mm (7 1/16")



RP-3124T Impact Wrenches

- Max Torque : 406 N.M (300 ft-lbs)
- Length : 166.5 mm (6 5/8")



Model	Square Drive		Bolt Diameter		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm	in	mm	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-P6	3/8	8	8/16	8	7600	200	150	6.3	90	142	5 5/8	230	8	1.43	3.15
RC-6LSB	3/8	5-6	3/16-1/4	6	10000	36	30	6.3	90	180	7 1/16	250	9	1.2	2.65
RP-3124T	3/8	13	1/2	13	9000	406	300	6.3	90	166.5	6 5/8	130	5	1.23	2.71

RP-3203A1 Impact Wrenches

- Max Torque : 81 N.M (60 ft-lbs)
- Length : 118 mm (4 5/8")




RP-3260T Impact Wrenches

- Max Torque : 928 N.M (690 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 191 mm (7 1/2")



RP-3208 Impact Wrenches

- Max Torque : 1085 N.M (800 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 178 mm (7")

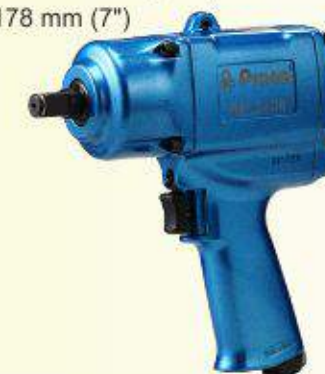

RP-3224T Impact Wrenches

- Max Torque : 515 N.M (380 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 166.5 mm (6 5/8")



RP-3241T Impact Wrenches

- Max Torque : 623 N.M (460 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 293 mm (11 1/2")



Model	Square Drive		Bolt Diameter		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm	in	mm	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-3203A1	1/4	10	3/8	10	10000	81	60	6.3	90	118	4 5/8	63	2	0.88	1.94
RP-3260T	1/2	16	5/8	16	7500	928	690	6.3	90	191	7 1/2	133	5	1.94	4.28
RP-3208	1/2	16	5/8	16	7500	1085	800	6.3	90	178	7	220	7.7	2.62	5.78
RP-3224T	1/2	16	5/8	16	9000	515	380	6.3	90	166.5	6 5/8	130	5	1.24	2.73
RP-3241T	1/2	16	5/8	16	8000	623	460	6.3	90	293	11 1/2	184	6	2.63	5.8



RP-3241T-2 Impact Wrenches

- Max Torque : 739 N.M (550 ft-lbs)
- Length : 235 mm (9 1/4")

Square Drive
1/2"



RP-3250G Impact Wrenches

- Max Torque : 740 N.M (550 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 208 mm (8 3/16")

Square Drive
1/2"



RP-161P Impact Wrenches

- Max Torque : 310 N.M (230 ft-lbs)
- Length : 183 mm (7 3/16")

Square Drive
1/2"



MADE IN JAPAN

RP-3125A Impact Wrenches

- Max Torque : 1626 N.M (1200 ft-lbs)
- Bolt Diameter : 32 mm (1 1/4")
- Length : 219 mm (8 5/8")

Square Drive
3/4"



RP-3238B1 Impact Wrenches

- Max Torque : 680 N.M (500 ft-lbs)
- Bolt Diameter : 16 mm (5/8")
- Length : 113.5 mm (4 1/2")

Square Drive
1/2"



RP-172P Impact Wrenches

- Max Torque : 430 N.M (320 ft-lbs)
- Length : 240 mm (9 1/2")

Square Drive
1/2"



MADE IN JAPAN

RP-3110C1 Impact Wrenches

- Max Torque : 1490 N.M (1100 ft-lbs)
- Bolt Diameter : 30 mm (1 3/16")
- Length : 227 mm (9")

Square Drive
3/4"



RP-3110G1 Impact Wrenches

- Max Torque : 1490 N.M (1100 ft-lbs)
- Bolt Diameter : 30 mm (1 3/16")
- Length : 227 mm (9")

Square Drive
3/4"



Model	Square Drive		Free Speed RPM	Max Torque		Air Pressure		Length		Air Consumption		Weight		
	in	mm		in	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-3241T-2	1/2	14	9/16	8000	739	550	6.3	90	235	9 1/4	200	7	2.7	5.95
RP-3250G	1/2	16	5/8	7500	740	550	6.3	90	208	8 3/16	153	5	2.86	6.31
RP-3238B1	1/2	16	5/8	10000	680	500	6.3	90	113.5	4 1/2	140	5	1.40	3.09
RP-172P	1/2	17	3/4	7400	430	320	6.3	90	240	9 1/2	400	14	2.6	5.73

Model	Square Drive		Free Speed RPM	Max Torque		Air Pressure		Length		Air Consumption		Weight		
	in	mm		in	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-161P	1/2	16	5/8	4900	310	230	6.3	90	183	7 3/16	240	8	2.45	5.4
RP-3125A	3/4	32	1 1/4	5750	1626	1200	6.3	90	219	8 5/8	195	7	3.15	6.95
RP-3110C1	3/4	30	1 3/16	4985	1490	1100	6.3	90	227	9	168	6	3.61	7.96
RP-3110G1	3/4	30	1 3/16	5500	1490	1100	6.3	90	227	9	167	6	5.40	11.9



RP-190P Impact Wrenches

- Max Torque : 470 N.M (350 ft-lbs)
- Length : 241 mm (9 1/2")



MADE IN JAPAN

RP-28P Impact Wrenches

- Max Torque : 1300 N.M (960 ft-lbs)
- Length : 253 mm (10")



MADE IN JAPAN

RP-4185A Impact Wrenches

- Max Torque : 2500 N.M (1850 ft-lbs)
- Length : 277 mm (11")



RP-400PA Impact Wrenches

- Max Torque : 2500 N.M (1850 ft-lbs)
- Length : 285 mm (11 3/16")



MADE IN JAPAN

RP-3286 Impact Wrenches

- Max Torque : 1490 N.M (1110 ft-lbs)
- Length : 178 mm (7")



RP-3266 Impact Wrenches

- Max Torque : 1898 N.M (1400 ft-lbs)
- Length : 210 mm (8 1/4")



RP-381P Impact Wrenches

- Max Torque : 2500 N.M (1850 ft-lbs)
- Length : 266 mm (10 1/2")



MADE IN JAPAN

RP-452P Impact Wrenches

- Max Torque : 3000 N.M (2210 ft-lbs)
- Length : 322 mm (12 3/4")



MADE IN JAPAN

Model	Square Drive		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm		RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg
RP-190P	3/4	19	5900	470	350	6.3	90	241	9 1/2	400	14	4.23	9.33
RP-28P	3/4	28	4500	1300	960	6.3	90	253	10	520	18	6.81	15.01
RP-3286	3/4	20	7500	1490	1110	6.3	90	178	7	220	7.7	2.68	5.9
RP-3266	3/4	30	7500	1898	1400	6.3	90	210	8 1/4	300	10.6	4.2	9.26

Model	Square Drive		Free Speed	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm		RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg
RP-4185A	1	33	4800	2500	1850	6.3	90	277	11	270	10	10.2	22.49
RP-400PA	1	41	4700	2500	1850	6.3	90	285	11 3/16	900	32	10.8	23.81
RP-381P	1	38	4500	2500	1850	6.3	90	266	10 1/2	700	25	10.3	22.71
RP-452P	1	45	2900	3000	2210	6.3	90	322	12 3/4	850	30	14.3	31.53



RP-45S-2 Impact Wrenches

- Max Torque : 3200 N.M (2360 ft-lbs)
- Length : 632 mm (25")



MADE IN JAPAN

RP-400SA Impact Wrenches

- Max Torque : 2300 N.M (1700 ft-lbs)
- Length : 516 mm (20 5/16")



MADE IN JAPAN

RP-400SA-2 Impact Wrenches

- Max Torque : 2400 N.M (1770 ft-lbs)
- Length : 350 mm (13 3/4")



MADE IN JAPAN

RP-535S Impact Wrenches

- Max Torque : 3100 N.M (2290 ft-lbs)
- Length : 632 mm (25")



MADE IN JAPAN

Model	Square Drive		Free Speed	Max Torque	Air Pressure		Length		Air Consumption		Weight			
	in	mm			in	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm
RP-45S-2	1	45	1 3/4	3200	3200	2360	6.3	90	632	25	850	30	17.1	37.7
RP-400SA	1	40	1 5/8	4400	2300	1700	6.3	90	516	20 5/16	750	27	12.1	26.68
RP-400SA-2	1	41	1 5/8	4400	2400	1770	6.3	90	350	13 3/4	750	27	10.6	23.37
RP-535S	1	46	1 3/4	3000	3100	2290	6.3	90	632	25	750	27	18.2	40.12

RP-535S-2 Impact Wrenches

- Max Torque : 3200 N.M (2360 ft-lbs)
- Length : 632 mm (25")



MADE IN JAPAN

RP-551S Impact Wrenches

- Max Torque : 5500 N.M (4060 ft-lbs)
- Length : 520 mm (20 1/2")



MADE IN JAPAN

RP-551SA Impact Wrenches

- Max Torque : 5500 N.M (4060 ft-lbs)
- Length : 553 mm (21 3/4")




MADE IN JAPAN

Model	Square Drive		Free Speed	Max Torque	Air Pressure		Length		Air Consumption		Weight			
	in	mm			in	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm
RP-535S-2	1	46	1 3/4	3000	3300	2440	6.3	90	444	17 1/2	750	27	18.2	40.12
RP-551S	1 1/2	55	2 1/8	3600	5500	4060	6.3	90	520	20 1/2	870	31	17.8	39.24
RP-551SA	1 1/2	55	2 1/8	3600	5500	4060	6.3	90	553	21 3/4	870	31	18	39.68




RC-4.5 Straight Shape Screwdriver




RC-4.5S Straight Shape Screwdriver



RC-6H Straight Shape Screwdriver



RC-8H Straight Shape Screwdriver



RC-5S Straight Shape Screwdriver



RC-5SS Straight Shape Screwdriver



RC-9H Straight Shape Screwdriver



RC-10H Straight Shape Screwdriver



RC-5.8 Straight Shape Screwdriver



RC-5.8S Straight Shape Screwdriver




RP-S6L Air Screwdriver



MADE IN JAPAN

RP-10L Air Screwdriver



Model	Tips Specification		Bolt Diameter		Free Speed RPM	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm	mm	in		N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RC-4.5	1/4		4-5	5/32-3/16	9000	14.5	11	6.3	90	176	7	220	8	0.7	1.54
RC-4.5S	1/4		4-5	5/32-3/16	9000	14.5	11	6.3	90	176	7	220	8	0.7	1.54
RC-5S	1/4		3-5	1/8-3/16	9000	12.5	9	6.3	90	156	6 1/16	220	8	0.6	1.32
RC-5SS	1/4		3-5	1/8-3/16	9000	12.5	9	6.3	90	156	6 1/16	220	8	0.6	1.32
RC-5.8	1/4		4-5	5/32-3/16	9000	18	13	6.3	90	180	7 1/16	220	8	0.7	1.54
RC-5.8S	1/4		4-5	5/32-3/16	9000	18	13	6.3	90	190	7 1/16	220	8	0.7	1.54

Model	Tips Specification		Bolt Diameter		Free Speed RPM	Max Torque		Air Pressure		Length		Air Consumption		Weight	
	in	mm	mm	in		N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RC-6H	1/4		6	1/4	8500	23.5	17	6.3	90	200	7 7/8	250	9	1	2.2
RC-8H	1/4		6	1/4	8500	28	21	6.3	90	202	8	250	9	1	2.2
RC-9H	1/4		6-8	1/4-5/16	8500	36	27	6.3	90	202	8	250	9	1	2.2
RC-10H	1/4		8-10	5/16-3/8	9500	42	31	6.3	90	200	7 7/8	250	9	1	2.2
RP-S6L	1/4		8	5/16	8000	-	-	6.3	90	212	8 3/8	310	11	1.33	2.93
RP-10L	1/4		6-8	1/4-5/16	8000	60	44	6.3	90	217	8 1/2	130	5	1.3	2.87



RP-418B Torque Control Screwdriver



- 1.External torsion operation adjustment simple, it can start once you press it.
- 2.Precise torsion Control , torsion control with high accuracy , And the torsion very stable.
- 3.When it reach the setting torsion value , the torsion control valve will be shut off air alltomatically The screwdriver also stop working automatically.

RC-240-90 90°Screwdriver



RP-P6L Pistol Shape Screwdriver



MADE IN JAPAN

RP-8008A Pistol Shape Screwdriver



RP-8018A Pistol Shape Screwdriver



RC-6LS Pistol Shape Screwdriver



RC-6LSP Pneumatic Screwdriver



Model	Tips Specification		Bolt Diameter	Free Speed	Max Torque	Air Pressure		Length		Air Consumption		Weight		
	in	mm				in	RPM	N.M	ft-lbs	kg/cm ²	psi	mm	in	l/min
RP-418B	1/4	2.5-4	1/10-5/32	1100	1.6	1	6.3	90	230	9	200	7	0.67	1.48
RC-240-90	1/4	4-5	5/32-3/16	5500	14.5	11	6.3	90	210	8 1/4	220	8	0.9	1.98
RP-P6L	1/4	8	5/16	7600	-	-	6.3	90	212	8 3/8	340	12	1.47	3.24
RP-8008A	1/4	6.4	1/4	550	12	9	6.3	90	215	8 1/2	140	5	1.28	2.82
RP-8018A	1/4	6.4	1/4	1800	12	9	6.3	90	215	8 1/2	140	5	1.23	2.71
RC-6LS	1/4	5-6	3/16-1/4	10000	36	27	6.3	90	180	7 1/16	250	9	1.2	2.65
RP-6LSP	1/4	8-10	5/16-3/8	9800	45	33	6.3	80	155	6 1/16	250	9	2.5	5.51

RP-295H Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only

Pad Size
5"



RP-5155A Disk Orbital Sanders

- Sand paper material : Vinyl / Hook(Velcro)
- Vac.Mode : Non-Vacuum only

Pad Size
5"



RP-5155CA Disk Orbital Sanders

- Sand paper material : Vinyl / Hook(Velcro)
- Vac.Mode : Central vacuum modes

Pad Size
5"



RP-5338 Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only

Pad Size
5"



RP-50VE/HE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only

Pad Size
5"




RPG-50VE/HE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Self-generated Vacuum only

Pad Size
5"



Model	Pad Size		Standard Thread		Free Speed	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		RPM	mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg
RP-295H	125	5	5	3/16	12000	10	3/8	6.3	90	280	11	90.7	3	1.3	2.87
RP-5155A	125	5	5	3/16	12000	10	3/8	6.3	90	152	6	57	2	0.80	1.76
RP-5155CA	125	5	5	3/16	12000	10	3/8	6.3	90	152	6	57	2	0.80	1.76
RP-5338	125	5	5	3/16	10000	10	3/8	6.3	90	123	4 7/8	226	8	0.68	1.5
RP-50VE	125	5	5	3/16	10000	10	3/8	6.3	90	153.6	6	453	16	0.81	1.79
RP-50HE	125	5	5	3/16	10000	10	3/8	6.3	90	153.6	6	453	16	0.81	1.79
RPG-50VE	125	5	5	3/16	10000	10	3/8	6.3	90	208.4	8 3/16	453	16	0.89	1.96
RPG-50HE	125	5	5	3/16	10000	10	3/8	6.3	90	208.4	8 3/16	453	16	0.89	1.96



RPG-51HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Central vacuum modes
- Oil-Free motor designed
- Uses wearproof materials

Pad Size
5"



RPG-52HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Central vacuum modes
- Fuel type
- Advanced metal material

Pad Size
5"



RP-51VE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only
- Oil-Free motor designed
- Uses wearproof materials

Pad Size
5"



RP-51HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only
- Oil-Free motor designed
- Uses wearproof materials

Pad Size
5"



RP-52VE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only
- Fuel type
- Advanced metal material

Pad Size
5"



RP-52HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only
- Fuel type
- Advanced metal material

Pad Size
5"



RP-61VE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only
- Oil-Free motor designed
- Uses wearproof materials

Pad Size
6"



RP-61HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only
- Oil-Free motor designed
- Uses wearproof materials

Pad Size
6"



RP-62VE Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only
- Fuel type
- Advanced metal material

Pad Size
6"



RP-62HE Disk Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only
- Fuel type
- Advanced metal material

Pad Size
6"



Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RPG-51HE	125	5	5	3/16	12000	6.35	1/4	6.3	90	208	8 3/16	170	6	0.80	1.76
RPG-52HE	125	5	5	3/16	12000	6.35	1/4	6.3	90	208	8 3/16	170	6	0.95	2.09
RP-51VE	125	5	5	3/16	12000	6.35	1/4	6.3	90	153	6	170	6	0.73	1.61
RP-51HE	125	5	5	3/16	12000	6.35	1/4	6.3	90	153	6	170	6	0.73	1.61
RP-52VE	125	5	5	3/16	12000	6.35	1/4	6.3	90	153	6	170	6	0.84	1.85
RP-52HV	125	5	5	3/16	12000	6.35	1/4	6.3	90	153	6	170	6	0.84	1.85

Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-61VE	150	6	5	3/16	12000	6.35	1/4	6.3	90	165	6 1/2	170	6	0.78	1.72
RP-61HE	150	6	5	3/16	12000	6.35	1/4	6.3	90	165	6 1/2	170	6	0.78	1.72
RP-62VE	150	6	5	3/16	12000	6.35	1/4	6.3	90	165	6 1/2	170	6	0.89	1.96
RP-62HE	150	6	5	3/16	12000	6.35	1/4	6.3	90	165	6 1/2	170	6	0.89	1.96



RP-296H Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only



Pad Size
6"

RP-5133C Disk Orbital Sanders

- Sand paper material : Vinyl
- Vac.Mode : Non-Vacuum only



Pad Size
3"

RP-5333C Triangle Plate Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Central vacuum modes



Pad Size
145X100
(Triangle)

RP-5331A Square Plate Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only



Pad Size
74X109

RP-5332A Square Plate Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only



Pad Size
80X133

RP-5334CA Square Plate Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Central vacuum modes




Pad Size
115X115

Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-296H	150	6	6	1/4	12000	10	3/8	6.3	90	280	11	90.7	3	1.30	2.87
RP-5133C	75	3	3	1/8	12000	10	3/8	6.3	90	143	5 5/8	57	2	0.61	1.34
RP-5333C	145X100	5 3/4X4	2.5	1/10	12000	10	3/8	6.3	90	237	9 5/16	71	3	0.735	1.62
RP-5331A	74X109	3X4 5/16	2.5	1/10	12000	10	3/8	6.3	90	180	7 1/10	71	3	0.69	1.52
RP-5332A	80X133	3 5/32X4 1/4	2.5	1/10	12000	10	3/8	6.3	90	180	7 1/10	71	3	0.69	1.52
RP-5334CA	115X115	4 1/2X4 1/2	2.5	1/10	12000	10	3/8	6.3	90	180	7 1/10	71	3	0.75	1.65



RP-5313C Square Plate Orbital Sanders


- Sand paper material : Hook(Velcro)
- Vac.Mode : Central vacuum modes

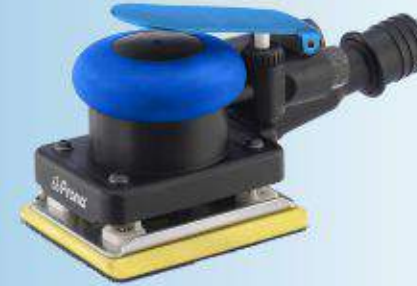

Pad Size
75X100

RP-5313N Square Plate Orbital Sanders


- Sand paper material : Hook(Velcro)
- Vac.Mode : Non-Vacuum only

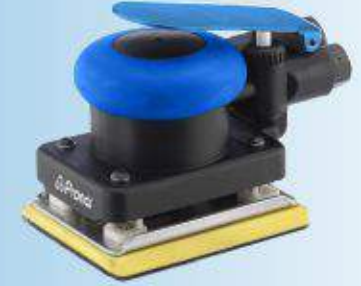

Pad Size
75X100

RP-5313S Square Plate Orbital Sanders

- Sand paper material : Hook(Velcro)
- Vac.Mode : Self-generated Vacuum only

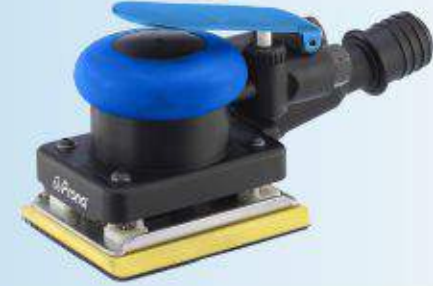

Pad Size
75X100

Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	l/min	cfm	kg	lbs
RP-5313C	75X100	3X4	3	1/8	10000	6.35	1/4	6.3	90	200	7	0.75	1.65
RP-5313N	75X100	3X4	3	1/8	10000	6.35	1/4	6.3	90	200	7	0.7	1.54
RP-5313S	75X100	3X4	3	1/8	10000	6.35	1/4	6.3	90	200	7	0.75	1.65

RP-103 Mini Roller Handy Belt Sanders

- Vac.Mode : Non-Vac. / Central Vac



Belt Size
60X260

Model	Belt Size		Belt Speed m/min	Free Speed RPM	Air hose Inner Dia		Air Pressure		Air Consumption		Weight	
	mm	in			mm	in	kg/cm ²	psi	l/min	cfm	kg	lbs
RP-103	60x260	2 3/8x10 1/4	1100	7000	6.35	1/4	6.3	90	250	8.8	1.1	2.43



RP-7311 90°Die Grinders

- Free Speed : 1800 RPM
- Length : 124 mm (4 7/8")

Collect Chuck
1/4"



RP-7276D 90°Die Grinders

- Free Speed : 22000 RPM
- Length : 140 mm (5 1/2")
- Exhaust : Side Exhaust

Collect Chuck
1/4"



RP-7015 Die Grinders

- Free Speed : 4000 RPM
- Length : 210 mm (8 1/4")

Collect Chuck
1/4"



RP-7015B Die Grinders

- Free Speed : 4000 RPM
- Length : 228 mm (9")

Collect Chuck
1/4"



RP-6 Die Grinders

- Free Speed : 25000 RPM
- Length : 143 mm (5 5/8")

Collect Chuck
1/4"



MADE IN JAPAN

Model	Collect Chuck		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-7311	6	1/4	18000	6.5	1/4	6.3	90	124	4 7/8	85	3	0.45	0.99
RP-7276D	6	1/4	22000	10	3/8	6.3	90	140	5 1/2	85	3	0.50	1.1
RP-7015	6	1/4	4000	10	3/8	6.3	90	210	8 1/4	110	4	0.90	1.98
RP-7015B	6	1/4	4000	10	3/8	6.3	90	228	9	110	4	0.92	2.028
RP-6	6	1/4	25000	9.5	3/8	6.5	90	143	5 5/8	440	16	0.51	1.12

RP-7317 Mini Die Grinders

- Free Speed : 25000 RPM
- Length : 152 mm (6")

Collect Chuck
1/4"



RP-7318 Die Grinders

- Free Speed : 20000 RPM
- Length : 175 mm (6 7/8")

Collect Chuck
1/4"



RP-7210R Die Grinders

- Free Speed : 20000 RPM
- Length : 165 mm (6 1/2")

Collect Chuck
1/4"



RP-7210R-K Suit Die Grinders

- Free Speed : 20000 RPM
- Length : 165 mm (6 1/2")

Collect Chuck
1/4"



Model	Collect Chuck		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-7317	6	1/4	25000	6.5	1/4	6.3	90	152	6	85	3	0.35	0.77
RP-7318	6	1/4	20000	10	3/8	6.3	90	175	6 7/8	100	4	0.62	1.37
RP-7210R	6	1/4	20000	10	3/8	6.3	90	165	6 1/2	113	4	0.55	1.21
RP-7210R-K	6	1/4	20000	10	3/8	6.3	90	165	6 1/2	113	4	1.65	3.64



RP-1031S2 Die Grinders

- Free Speed : 20000 RPM
- Length : 175 mm (6 7/8")

Collect Chuck
1/4"



RP-1034S2 Die Grinders

- Free Speed : 25000 RPM
- Length : 260 mm (10 1/4")

Collect Chuck
1/4"



RP-1035S2 Die Grinders

- Free Speed : 25000 RPM
- Length : 152 mm (6")

Collect Chuck
1/4"



RP-1036S2 Die Grinders

- Free Speed : 18000 RPM
- Length : 155 mm (6 1/8")

Collect Chuck
1/4"



RP-1437S2 Die Grinders

- Free Speed : 25000 RPM
- Length : 140 mm (5")

Collect Chuck
3/8"



RP-3036S2 Die Grinders

- Free Speed : 25000 RPM
- Length : 140 mm (5")

Collect Chuck
3/8"



RP-4 Heavy Bench Grinder

- Length : 228 mm (9")

Pad Size
4"



MADE IN JAPAN

RP-4A Heavy Bench Grinder

- Length : 300 mm (11 7/8")

Pad Size
4"



MADE IN JAPAN

RP-7 Heavy Bench Grinder

- Length : 254 mm (10")

Pad Size
7"



MADE IN JAPAN

RP-7AA Heavy Bench Grinder

- Length : 360 mm (14 1/2")

Pad Size
7"



MADE IN JAPAN

Model	Collect Chuck		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-1031S2	6	1/4	20000	9.5	3/8	6.3	90	175	6 7/8	453	16	0.62	1.37
RP-1034S2	6	1/4	25000	6	1/4	6.3	90	260	10 1/4	356	14	0.64	1.41
RP-1035S2	6	1/4	25000	6	1/4	6.3	90	152	6	356	14	0.35	0.77
RP-1036S2	6	1/4	18000	6	1/4	6.3	90	155	6 1/8	356	14	0.49	1.08
RP-1437S2	9.5	3/8	25000	9.5	3/8	6.5	90	200	7 7/8	140	5	0.84	1.85
RP-3036S2	9.5	3/8	25000	9.5	3/8	6.5	90	200	7 7/8	140	5	0.58	1.28

Model	Pad Size		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-4	100X6X16	4X5/16X5/8	10000	9.5	3/8	6.3	90	228	9	600	21	2.0	4.41
RP-4A	100X6X16	4X5/16X5/8	10000	9.5	3/8	6.3	90	300	11 7/8	600	21	2.05	4.52
RP-7	180X6X22	7 1/16 X5/16X7/8	6000	12.7	1/2	6.3	90	254	10	750	27	3.2	7.05
RP-7AA	180X6X22	7 1/16 X5/16X7/8	6000	12.7	1/2	6.3	90	360	14 1/2	750	27	3.7	8.16



RP-2276 Heavy Bench Grinder

Thread Specification : M6*1.0P
 Outside Diameter 9.5mm (3/8")
 The Motor Power : 0.25 HP
 Exhaust : Side Exhaust

Pad Size
2"



RP-2076 Light Bench Grinder

● Length : 190 mm (7 1/2")

Pad Size
4"



RP-01 Reciprocating Grinding Machine

● Spindle Thread : 5 mm (3/16")
 ● Length : 200 mm (7 7/8")

Pad Size
60X18



RP-02 Eccentric Type Sand Mill Machine

● Spindle Thread : 3 mm (1/8")
 ● Length : 160 mm (6 5/16")

Pad Size
2"



RP-2176 Heavy Bench Grinder

Shaft Size : M8*1.25P
 ● The Motor Power : 0.6 HP
 ● Length : 180 mm (7 1/10")

Pad Size
4"



RP-1090 Dual piston straight grinder

● Stroke Length : 25.4mm (1")
 ● Length : 406 mm (16")

Pad Size
407X63.5



RP-03 Eccentric Type Sand Mill Machine

● Spindle Thread : 3 mm (1/8")
 ● Length : 160 mm (6 5/16")

Pad Size
3"



RP-03A Power Sanding Machine

● Spindle Thread : 3 mm (1/8")
 ● Length : 160 mm (6 5/16")

Pad Size
3"



Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-2276	50	2	5	0.2	22000	10	3/8	6.3	90	140	5 1/2	500	18	0.53	1.17
RP-2076	100	4	-	-	13000	10	3/8	6.3	90	190	7 1/2	400	14	0.96	2.12
RP-2176	102	4	-	-	12000	10	3/8	6.3	90	180	7 1/10	60	2	1.60	3.53
RP-1090	407X63.5	16X2 1/2	-	-	2500	10	3/8	6.3	90	406	16	226	8	3.10	6.83

Model	Pad Size		Standard Thread		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-01	60X18	2 5/8 X 7/10	5	3/16	13000	10	3/8	6.3	90	200	7 7/8	400	14	0.83	1.83
RP-02	50	2	3	1/8	15000	10	3/8	6.3	90	160	6 5/16	400	14	0.70	1.54
RP-03	75	3	3	1/8	15000	10	3/8	6.3	90	160	6 5/16	400	14	0.80	1.76
RP-03A	75	3	3	1/8	25000	10	3/8	6.3	90	160	6 5/16	400	14	0.81	1.79



RP-7010B

Reciprocating Saw

RP-25C

Air Hammer



MADE IN JAPAN

RP-25CN

Air Hammer



MADE IN JAPAN



RP-7181

10mm Saw



RP-20


Air Hammer



MADE IN JAPAN

RP-20N

Air Hammer

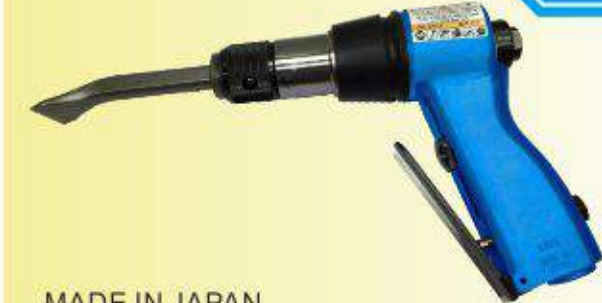

MADE IN JAPAN



RP-7281

Mini Saw



RP-HR90

Air Hammer



Optional

Model	Cutting Thickness		Cutting Stroke		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-7010B	Fe:1.6 Al:2.5	Fe:3/50 Al:1/10	10	3/8	9000	10	3/8	6.3	90	246	9 3/4	30.5	1	0.695	1.53
RP-7181	Fe:2.1 Al:2.3	Fe:2/25 Al:1/10	5	3/16	5000	10	3/8	6.3	90	330	13	30.5	1	1.06	2.34
RP-7281	Fe:1.0 Al:3.0	Fe:1/25 Al:1/8	5	3/16	7000	10	3/8	6.3	90	200	7 7/8	200	7	0.38	0.84

Model	Piston Stroke		Stroke Rate RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-25C	22	7/8	4000	25	1	6.3	90	232	9 1/8	200	7	1.7	3.75
RP-25CN	22	7/8	4000	25	1	6.3	90	232	9 1/8	200	7	1.7	3.75
RP-20	12	1/2	4000	20	13/16	6.3	90	198	7 3/4	190	7	1.8	3.97
RP-20N	12	1/2	4000	20	13/16	6.3	90	198	7 3/4	190	7	1.8	3.97
RP-HR90	89	3 1/2	2000	10	3/8	6.3	90	266.4	10 1/2	77.6	3	1.94	4.28



RP-242 Med Barrel Air Hammers



RP-242-B Hammer Kits



- 1Pc Air Hammer
- 5Pcs Chisel
- 1Pcs Spring
- 1Pcs Quick Change Retainer
- 1Pcs 1/4" Air Nipple

RP-268FL Medium Duty Chisel Scaler



RP-268K-B Scaler Kits



- 1Pc Needle Scaler
- 1Pcs Moil Point Chisel
- 1Pcs 20mm Flat Chisel
- 1Pcs 35mm Bent Chisel
- 1Pcs 1/4" Air Nipple
- 1Set Needle Attachment

RP-711 Med Barrel Air Hammers



RP-715 Long Barrel Air Hammers



RP-270F Medium Duty Chisel Scaler



RP-270K-B Scaler Kits



- 1Pc Needle Scaler
- 1Pcs Moil Point Chisel
- 1Pcs 20mm Flat Chisel
- 1Pcs 35mm Bent Chisel
- 1Pcs 1/4" Air Nipple
- 1Set Needle Attachment

RP-3190 Composite Vibro-reduced pneumatic Hammers




RP-820K-B Hammer Kits




- 1Pc Air Hammer
- 5Pcs Chisel
- 1Pcs Spring
- 1Pcs Quick Change Retainer
- 1Pcs 1/4" Air Nipple

RP-288NS Light Duty Needle Scaler



RP-288NSL Light Duty Needle Scaler



Model	Piston Stroke		Stroke Rate RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-242	60	2 1/8	3000	10	3/8	6.3	90	170	6 1/4	176	6.2	1.5	3.3
RP-242-B	60	2 1/8	3000	10	3/8	6.3	90	170	6 1/4	176	6.2	3.2	7.05
RP-711	60	2 1/8	3000	10	3/8	6.3	90	175	6 7/8	187	6.6	1.7	3.8
RP-716	90	3 1/2	2100	10	3/8	6.3	90	220	8 3/4	210	7.4	2	4.4
RP-3190	70	2 3/4	3000	10	3/8	6.3	90	215	8 1/2	220	7.8	1.6	3.5
RP-820K-B	75	3	2500	10	3/8	6.3	90	245	8 3/4	232	8.2	4.2	9.26

Model	Piston Stroke		Stroke Rate RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-268FL	38	1 1/2	4800	10	3/8	6.3	90	380	15	240	8.5	2.1	4.6
RP-268K-B	38	1 1/2	4800	10	3/8	6.3	90	380	15	240	8.5	4	8.8
RP-270F	33	1 3/16	5000	10	3/8	6.3	90	420	13 1/2	198	7	1.8	3.9
RP-270K-B	33	1 3/16	5000	10	3/8	6.3	90	420	13 1/2	198	7	3.9	9.3
RP-288NS	18	1 7/16	5000	10	3/8	6.3	90	290	11 3/4	49	1.7	1.3	2.9
RP-288NSL	18	1 7/16	5000	10	3/8	6.3	90	290	11 3/4	49	1.7	1.3	2.9



RP-70A Engraving

1/8 Engraving Pen

RP-908 Engraving pen



RP-909 Engraving pen



Model	Collect Chuck		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-70A	3	1/8	70000	10	3/8	6.3	90	150	6	50	1.8	0.7	1.54
RP-908	-	-	3300-3400	10	3/8	6.3	90	1650	65	56.6	2	0.18	0.4
RP-909	-	-	3500-3800	10	3/8	6.3	90	1690	66 1/2	56.6	2	0.19	0.42

RP-600A Air Nibbler



Model	Cutting Capacity		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	mm	in		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-600A	1.2	0.5	2600	10	3/8	6.3	90	116	4	113.3	4 1/16	0.94	2.07

RP-1037S2 Straight Shape Pistol Drill

Drilling Capacity 3/8"



RP-1037 Straight Shape Pistol Drill

Drilling Capacity 3/8"



RP-7309 90° Pistol Drill

Drilling Capacity 3/8"



RP-7118A Self-locking Pistol Drills

- Small size, light weight, low noise level.
- Use for narrow bore and reaming and tap operation.

Drilling Capacity 3/8"




RP-7118KL Pistol Shape Pneumatic Drill

- Small size, light weight, low noise level.
- Use for narrow bore and reaming and tap operation.

Drilling Capacity 3/8"



Model	Drilling Capacity in	Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
			mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-1037S2	3/8	25000	10	3/8	6.3	90	210	8 1/4	140	5	0.94	2.07
RP-1037	3/8	2500	10	3/8	6.3	90	229	9	100	4	0.91	2
RP-7309	3/8	1800	10	3/8	6.3	90	210	8 1/4	113	4	1.10	2.43
RP-7118A	3/8	1800	10	3/8	6.3	90	203	8	140	5	1.12	2.47
RP-7118KL	3/8	1800	10	3/8	6.3	90	203	8	140	5	1.12	2.47



RP-7302 Positive Reverse Pistol Drill

Drilling Capacity
3/8"



RP-7307 Pistol Drill

Drilling Capacity
1/2"



RP-10R Pistol Drill

Drilling Capacity
1/4"



MADE IN JAPAN

RP-13R Pistol Drill

Drilling Capacity
1/4"




MADE IN JAPAN

Model	Drilling Capacity		Free Speed RPM	Air hose Inner Dia		Air Pressure		Length		Air Consumption		Weight	
	in	mm		mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-7302	3/8	10	1800	3/8	6.3	90	203	8	113	4	1.10	2.43	
RP-7307	1/2	10	800	3/8	6.3	90	235	9 1/4	113	4	1.95	4.3	
RP-10R	3/8	10	2000	0.4	6.3	90	192	7 9/16	560	20	1.10	2.42	
RP-13R	1/2	10	450	0.4	6.3	90	240	9 1/2	560	20	1.7	6.69	

RP-D35-18 Pneumatic Top Carton Closing Stapler


Use: The speed is very fast, suitable for large-scale packing pipelining.



13 Gauge

RP-D35-18M Manual Top Carton Closing Stapler


Use: Hand-operated, easy to handle, suitable for workplace without air source.



13 Gauge

RP-19-35 Pneumatic Top Carton Closing Stapler


Use: The speed is very fast, suitable for large-scale packing pipelining.



13 Gauge

RP-19-35M Manual Top Carton Closing Stapler

Use: Hand-operated, easy to handle, suitable for workplace without air source.



13 Gauge

Model	Nail Width		Nail Specification		Nail Length		Air Pressure		Length		Air Consumption		Weight	
	mm	in	mm	in	mm	in	kg/cm ²	psi	mm	in	l/min	cfm	kg	lbs
RP-D35-18	35	1 3/8	0.9x2.2	1/25x1/10	15	5/8	6.3	90	402	15 3/4	0.979	0.04	2.02	4.45
RP-D35-18M	35	1 3/8	0.9x2.2	1/25x1/10	15	5/8	-	-	460	18 1/10	-	-	1.86	4.1
RP-19-35	35	1 3/8	0.9x2.2	1/25x1/10	15	5/8	6.3	90	415	16 9/16	1.02	0.04	2.65	5.84
RP-19-35M	35	1 3/8	0.9x2.2	1/25x1/10	15	5/8	-	-	375	14 3/4	-	-	1.70	3.75



RP-7333 Rivet Gun

Specification : 3/32", 1/8", 5/32", 3/16"



RP-7334 Rivet Gun

Specification : 3/32", 1/8", 5/32", 3/16", 7/32", 1/4"



RP-7190 Rivet Gun

Specification : 3/32", 1/8", 5/32", 3/16"



RP-7270 Rivet Gun

Specification : 3/32", 1/8", 5/32", 3/16"



RP-7380 Rivet Gun

Specification : 5/16", 1/4", 7/32", 3/16"



RP-801 Rivet Gun

Specification : 3/32", 1/8", 5/32", 3/16"



RP-20 Pull Nut Nail Gun

Specification : M3, M4, M5, M6, M8



RP-25 Pull Nut Nail Gun

Specification : M4, M5, M6, M8, M10, M12



RP-0123 Pull Nut Nail Gun

Specification : M4, M5, M6, M8, M10, M12



RP-7380HKR Pull Nut Nail Gun

Specification : 3/16" □ 1/4"




Model	Pull nail Range		Air hose Inner Dia		Length		Pull		Weight		Air Pressure	
	mm	in	mm	in	mm	in	kg	lbs	kg	lbs	kg/cm ²	psi
RP-7333	14	9/16	10	3/8	273	10 3/4	880	1940	1.49	3.28	6.3	90
RP-7334	14	9/16	10	3/8	295	11 5/8	1385	3053	1.97	4.34	6.3	90
RP-7190	15	5/8	10	3/8	250	9 3/4	908	2002	1.48	3.26	6.3	90
RP-7270	23.5	1	10	3/8	270	10 5/8	908	2002	1.55	3.42	6.3	90
RP-7380	22.5	7/8	10	3/8	305	12	1723	3800	1.88	4.15	6.3	90
RP-801	14	9/16	10	3/8	228	9	725	1598	1.5	3.31	6.3	90

Model	Pull nail Range		Air hose Inner Dia		Length		Pull		Weight		Air Pressure	
	mm	in	mm	in	mm	in	kg	lbs	kg	lbs	kg/cm ²	psi
RP-20	7	7/25	10	3/8	278	11	1452	3200	2.1	4.63	6.3	90
RP-25	7	7/25	10	3/8	278	11	2179	4804	2.4	5.29	6.3	90
RP-0123	2-10	2/25-3/8	10	3/8	270	10 5/8	1650	3638	1.55	3.42	6.3	90
RP-7380HKR	19.5	3/4	10	3/8	224.8	8 7/8	2033	4480	1.74	3.84	6.3	90



N18/30A Finish Nailer


Use: To inlay polywood, battern and cany products.



18 Gauge

B16/50-C1 Finish Nailer

Use: To inlay drawing board, floor board. It can be also used to assemble the cupboard and furniture.

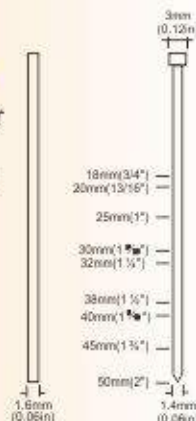

16 Gauge

Model	Size		Capacity	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
N18/30A	255X56X182	10X2 3/8 X7 7/8	100	10	3/8	1.2	2.7	6.3	90
B16/50-C1	295X76X278	11 5/8 X3 X11	100	10	3/8	1.9	4.2	6.3	90



A22/83-N1 Angle Framing Nailer


Use: Architectural woodworking, Sash & mill working, Pallet manufacturing, Joint assembly, Subflooring, Trusses sheathing, Decking, Framing.



9-11 Gauge

A22/90-B1 Angle Framing Nailer


Use: Architectural woodworking, Sash & mill working, Pallet manufacturing, Joint assembly, Subflooring, Trusses sheathing, Decking, Framing.



9-11 Gauge

A34/83-N1 Angle Framing Nailer


Use: Architectural woodworking, Sash & mill working, Pallet manufacturing, Joint assembly, Subflooring, Trusses sheathing, Decking, Framing.

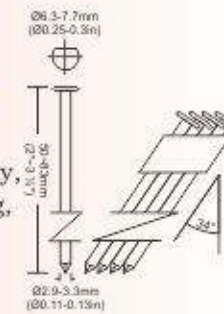

9-11 Gauge


A34/90-K1 Angle Framing Nailer

Use: Architectural woodworking, Sash & mill working, Pallet manufacturing, Joint assembly, Subflooring, Trusses sheathing, Decking, Framing.

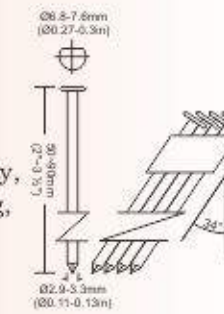

9-11 Gauge

Model	Size		Capacity	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
A22/83-N1	533X127X296	21X5X11 5/8	64	10	3/8	3.17	6.99	6.3	90
A22/90H-B1	522X138X366	20 9/16 X5 7/16 X14 3/8	68	10	3/8	3.3	7.28	6.3	90
A34/83-N1	455X125X318	18X5X12 1/2	90	10	3/8	3.35	7.39	6.3	90
A34/90-K1	448X151X345	17 5/8 X6 X13 5/8	90	10	3/8	3.4	7.5	6.3	90

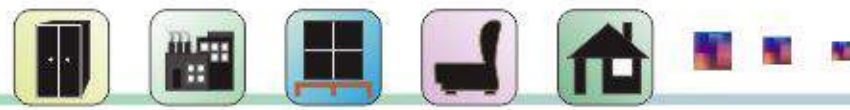


RP-1010FA Composite Finish Nailer

Use: To make the furniture and inlay cloth and leather.



20 Gauge




RP-1010FA1 Composite Finish Nailer

Use: To make the furniture and inlay cloth and leather.



20 Gauge




S10/10F-A1 Composite Finish Nailer

Use: To make the furniture and inlay cloth and leather.



23 Gauge




S10/13J-D1 Composite Finish Nailer

Use: To connect small wood-work, inlay ceiling cloth and leather.



18 Gauge




RP-1013JA Composite Finish Nailer

Use: To connect small wood-work, inlay ceiling cloth and leather.



20 Gauge

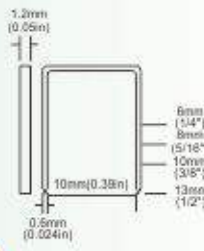


RP-1013JA1 Composite Finish Nailer

Use: To connect small wood-work, inlay ceiling cloth and leather.



20 Gauge

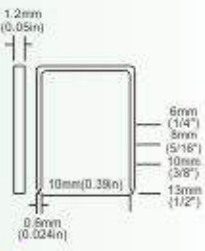


S71/16-C1 Composite Finish Nailer

Use: To connect small wood-work, inlay ceiling cloth and leather.



22 Gauge




S80/16-C1 Composite Finish Nailer

Use: To connect small wood-work, inlay ceiling cloth and leather.



21 Gauge




Model	Size		Capacity	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
RP-1010FA	224X48X146	8 3/4 X 1 7/8 X 5 3/4	100	10	3/8	0.92	2.03	6.3	90
RP-1010FA1	230X46X146	9 X 1 3/4 X 5 3/4	100	10	3/8	0.96	2.12	6.3	90
RP-1013JA	224X48X146	8 3/4 X 1 7/8 X 5 3/4	100	10	3/8	0.92	2.03	6.3	90
RP-1013JA1	230X46X146	9 X 1 3/4 X 5 3/4	100	10	3/8	0.96	2.12	6.3	90

Model	Size		Capacity	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
S10/10F-A1	222X44X153	8 3/4 X 1 3/4 X 6	180	10	3/8	0.8	1.76	6.3	90
S10/13J-D1	217X44X155	8 1/2 X 1 3/4 X 6 1/8	125	10	3/8	0.8	1.76	6.3	90
S71/16-C1	438X42X152	17 1/4 X 1 5/8 X 6	185	10	3/8	0.8	1.76	6.3	90
S80/16-C1	438X42X152	17 1/4 X 1 5/8 X 6	157	10	3/8	0.9	1.98	6.3	90



N425J Composite Finish Nailer


Use: To make furniture , position spring and fix the plank and plasterboard.



20 Gauge

90/40-A1 Composite Finish Nailer

Use: To make furniture , position spring and fix the plank and plasterboard.



18 Gauge

S8/51-B1 Composite Finish Nailer

Use: For wooden furniture , wooden case , and fix all kinds of floor board.



16 Gauge

16/851-A2 Composite Finish Nailer


Use: For wooden furniture , wooden case , and fix all kinds of floor board.



16 Gauge

C23/57-A1 Coil Nailer

Use: For export packing , crate and frame.

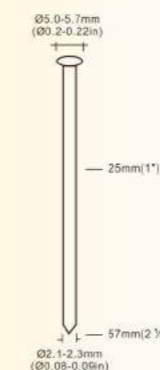

13 Gauge

C29/65-A1 Coil Nailer

Use: To bind the platform board wooden case , pallet and plank.



11-12 Gauge

C29/70-A1 Coil Nailer

Use: To bind the platform board wooden case , pallet and plank.



11-13 Gauge

Model	Size		Capacity stick	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
N425J	244X55X195	9 5/8 X 2 5/32 X 7 2/3	100	10	3/8	1.2	2.64	6.3	90
90/40-A1	310X76X274	12 3/16 X 3 X 10 3/4	160	10	3/8	1.7	3.75	6.3	90
S8/51-B1	360X78X272	14 5/32 X 3 1/8 X 10 3/4	140	10	3/8	1.94	4.28	6.3	90
16/851-A2	369X93X286	14 1/2 X 3 2/3 X 11 1/4	150	10	3/8	2.5	5.51	6.3	90

Model	Size		Capacity stick	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
C23/57-A1	302X132X285	11 7/8 X 5 3/16 X 11 3/16	300-350	10	3/8	2.7	5.95	6.3	90
C29/65-A1	296X132X316	10 9/16 X 5 3/16 X 12 7/16	250-300	10	3/8	2.6	5.73	6.3	90
C29/70-A1	339X129X317	13 1/3 X 5 2/25 X 12 1/2	250-300	10	3/8	3.6	7.93	6.3	90



C31/45 Coil Nailer


Use: Roof, bottom floor, fence, indoor decoration, etc.



11 Gauge

C33/83-A1 Coil Nailer


Use: To make heavy loads wooden case.

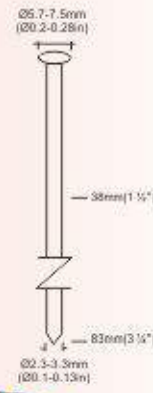

10-13 Gauge

C33/100-A1 Coil Nailer

Use: To make heavy loads wooden case.

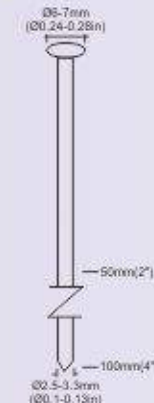

10-12 Gauge

C33/90-A3 Coil Nailer

Use: To make heavy loads wooden case.



10-12 Gauge

C38/130-A1 Coil Nailer

Use: Poulful Coil-nailer, suitable for the making of high strength platforms and heavy load packing boxes.



9-11 Gauge


Model	Size		Capacity stick	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
C31/45	295X115X275	11 5/8X4 1/2X10 7/8	120	10	3/8	2.2	4.85	6.3	90
C33/83-A1	339X132X365	13 1/2X5 1/2X14 3/8	225-300	10	3/8	3.8	8.38	6.3	90
C33/90-A3	385X143X370	15 1/2X5 5/8X14 3/8	200-300	10	3/8	3.6	7.94	6.3	90

Model	Size		Capacity stick	Air hose Inner Dia		Weight		Air Pressure	
	mm	in		mm	in	kg	lbs	kg/cm ²	psi
C33/100-A1	350X148X408	13 3/4X5 7/8X16	200-300	10	3/8	4.5	9.92	6.3	90
C38/130-A1	338X154X497	13 1/4X6X18 3/8	120-225	10	3/8	5.8	12.79	6.3	90




5 Inch sand paper

- Size: 125mm (5")
- Particle range: P040-P600



6 Inch sand paper

- Size: 150mm (6")
- Particle range: P040-P600




6 Galvanized nail

- Specification: 6/12,6/18,
6/20,6/22,
6/25,6/30




F Type straight nail

- Specification:
F15,F20,
F25,F30,
F38,F50




Coil nail

- Specification: FC32V1
FC38V1




Coil nail

- Specification: FS32V1
FS38V1




Coil nail

- Specification: FS50V1
FS57V5

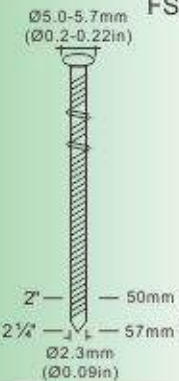

Coil nail

- Specification: FS64V5

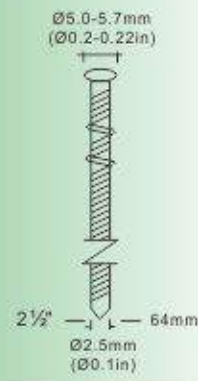

Coil nail

- Specification: FS70V9




Coil nail

- Specification: FS80W1
FS310W1




Coil nail

- Specification: FS90V3

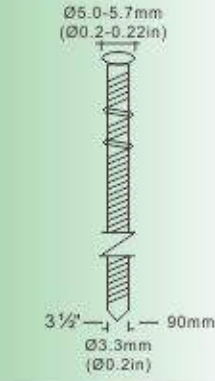

Code nail

- Specification: N2,N15,N17,
N19,N21

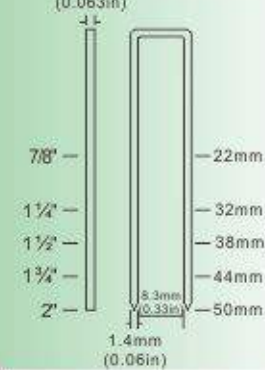


Code nail

- Specification: 7111,7112,
7114,7116




Code nail

- Specification: 1410



Code nail

- Specification: 425K,428K,432K,
438K,440K

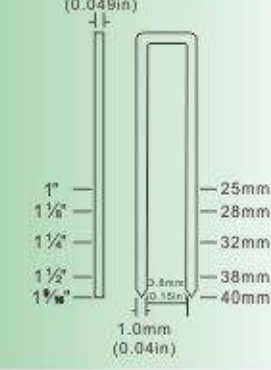

ST-9027

175mm(7")Chisel Sets
Chisel Shank 10.2mm
(2/5")Hex

ST-9028

175mm(7")Chisel Sets
Chisel Shank 10.2mm
(2/5")Round

ST-9032

125mm(5")Chisel Sets
Chisel Shank 10.2mm
(2/5")Round

ST-9033

125mm(5")Chisel Sets
Chisel Shank 10.2mm
(2/5")Hex



1



2

Flat Chisel

Item	Model	Description	Length		Width		Chisel Shank	
			mm	in	mm	in	mm	in
1	ST-OS-20R	Flat Chisel	250	9 7/8	20	7/8	17.2	3/4
2	ST-OS-20H	Flat Chisel	250	9 7/8	20	7/8	17.2	3/4



1



2

Tapered Punch

Item	Model	Description	Length	
			mm	in
1	ST-33-7R	Tapered Punch	175	7
2	ST-33-7H	Tapered Punch	175	7



1



2



3



4

Chisel Shank 9.5mm(19/50")




5



6



7



8

Chisel Shank 12.7mm(1/2")

Item	Model	Description	Length		Width	
			mm	in	mm	in
1	ST-26850	2"Flat Chisel	175	7	50	2
2	ST-26835	1-1/3"Flat Chisel	175	7	35	1 3/8
3	ST-26820	3/4"Flat Chisel	175	7	20	7/8
4	ST-26801	Moil Point Chisel	175	7	-	-
5	ST-27050	2"Flat Chisel	175	7	50	2
6	ST-27035	1-1/3"Flat Chisel	175	7	35	1 3/8
7	ST-27020	3/4"Flat Chisel	175	7	20	7/8
8	ST-27001	Moil Point Chisel	175	7	-	-

Balancer


Feature : Screw type design , balanced out pull , can be ceased wherever the tool pull.



SB-5K



SB-7K

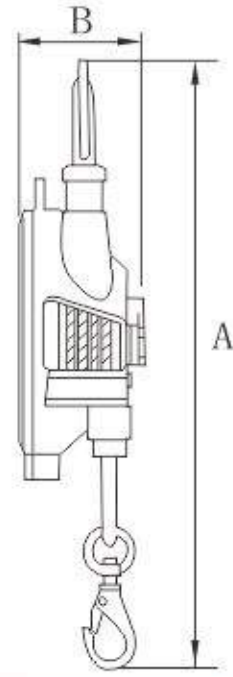


SB-5k/7K



SB-9K



SB-15K

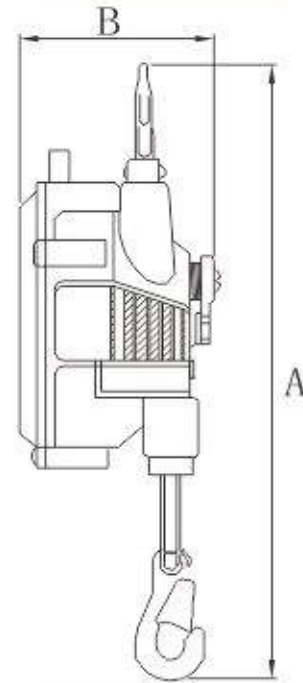

SB-9k/15K

Model	Capacity		Travel		Rope Option	Rope Dia.		Weight		Q'ty	G.W./Ctn.		Cuft	A		B	
	kg	lbs	m	in		mm	in	kg	lbs		kg	lbs		mm	in	mm	in
SB-5K	3-5	6.6-11	1.3	51 3/16	Cable	3.2	1/8	1.82	4.01	10	19.2	42.33	1.7	340	13 3/8	74	3
SB-7K	5-7	11-15.4	1.3	51 3/16	Cable	3.2	1/8	1.85	4.08	10	19.5	42.99	1.7	340	13 3/8	74	3
SB-9K	5-9	11-19.8	1.3	51 3/16	Cable	4.7	3/16	3.59	7.91	4	15.36	33.86	1.9	380	15	115	4 1/2
SB-15K	9-15	19.8-33	1.3	51 3/16	Cable	4.7	3/16	3.61	7.96	4	15.44	34.04	1.9	380	15	115	4 1/2

Balancer


Feature : Economical , practical ,small in size , pull can be adjusted easily because of the screw adjustable cap.



SB-1200



SB-2000

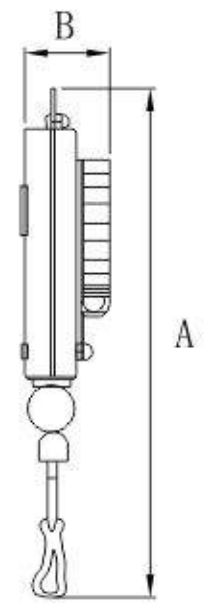

SB-3000



SB-5000

Model	Capacity		Travel		Rope Option	Rope Dia.		Weight		Q'ty	G.W./Ctn.		Cuft	A		B	
	kg	lbs	m	in		mm	in	kg	lbs		kg	lbs		mm	in	mm	in
SB-1200	0.6-1.5	1.32-3.3	1.6	67	Nylon / Cable	2.5	1/10	0.52	1.15	40	21	46.3	1.7	240	7/16	44	1 3/4
SB-2000	1.0-2.0	2.2-4.4	1.6	67	Nylon / Cable	2.5	1/10	0.52	1.15	40	21	46.3	1.7	240	7/16	44	1 3/4
SB-3000	1.5-3	3.3-6.6	1.5	59	Cable	3.2	1/8	0.76	1.68	30	22.75	50.16	1.6	290	11 3/8	47	1 7/8
SB-5000	3-5	6.6-11	1.5	59	Cable	3.2	1/8	0.81	1.79	30	24.1	53.13	1.6	290	11 3/8	47	1 7/8

Bit

Tamper Star Bit



Item NO.	Specification	Length		Case/Pcs
		mm	in	
T15Y50P	T15	50	2	10
T20Y50P	T20	50	2	10
T25Y50P	T25	50	2	10
T27Y50P	T27	50	2	10
T30Y50P	T30	50	2	10
T15Y65P	T15	65	2 5/16	10
T20Y65P	T20	65	2 5/16	10
T25Y65P	T25	65	2 5/16	10
T27Y65P	T27	65	2 5/16	10
T30Y65P	T30	65	2 5/16	10
T15Y100P	T15	100	4	10
T20Y100P	T20	100	4	10
T25Y100P	T25	100	4	10
T27Y100P	T27	100	4	10
T30Y100P	T30	100	4	10
T15Y150P	T15	150	6	10
T20Y150P	T20	150	6	10
T25Y150P	T25	150	6	10
T15Y200P	T15	200	8	10
T20Y200P	T20	200	8	10
T25Y200P	T25	200	8	10

Ph2 Double ended Bit(Black Gold)



Item NO.	Specification	Length		Case/Pcs
		mm	in	
Black gold	#2x65L	65	2 5/16	10
	#2x100L	100	4	10

Ph2 Double ended Bit(Platinic)



Item NO.	Specification	Length		Case/Pcs
		mm	in	
Platinic	#2x65L	65	2 5/16	10
	#2x100L	100	4	10

Ph2 Double ended Bit



Item NO.	Specification	Length		Case/Pcs
		mm	in	
PP2100P	#2X100L	100	4	10
PP2150P	#2X150L	150	6	10
PP2200P	#2X200L	200	8	10
PP2250P	#2X250L	250	10	10
PP2300P	#2X300L	300	12	10

Phillips#2 Power Bit



Item NO.	Specification	Length		Case/Pcs
		mm	in	
PH225P	PH2	25	1	10
PH250P	PH2	50	2	10
PH265P	PH2	65	2 5/16	10
PH2100P	PH2	100	4	10
PH2150P	PH2	150	6	10
PH2200P	PH2	200	8	10
PH2250P	PH2	250	10	10
PH230P	PH2	300	12	10

Hex Power Bit



Item NO.	Specification	Length		Case/Pcs	
		mm	in		
H02050P	2	2/25	50	2	10
H02550P	2.5	1/10	50	2	10
H03050P	3	1/8	50	2	10
H04050P	4	5/32	50	2	10
H05050P	5	3/16	50	2	10
H06050P	6	1/4	50	2	10
H02065P	2	2/25	65	2 5/16	10
H02565P	2.5	1/10	65	2 5/16	10
H03065P	3	1/8	65	2 5/16	10
H04065P	4	5/32	65	2 5/16	10
H05065P	5	3/16	65	2 5/16	10
H06065P	6	1/4	65	2 5/16	10
H040100P	4	5/32	100	4	10
H050100P	5	3/16	100	4	10
H060100P	6	1/4	100	4	10

Pozidriv#2 Power Bit



Item NO.	Specification	Length		Case/Pcs
		mm	in	
PZ225P	PZ2	25	1	10
PZ250P	PZ2	50	2	10
PZ265P	PZ2	65	2 5/16	10
PZ2100P	PZ2	100	4	10
PZ2150P	PZ2	150	6	10

Magnetic Nut Setter



Item NO.	Specification	Length		Case/Pcs	
		mm	in		
M0665P	6	1/4	65	2 5/16	10
M0865P	8	5/16	65	2 5/16	10
M1065P	10	3/8	65	2 5/16	10
M1165P	11	7/16	65	2 5/16	10
M1265P	12	1/2	65	2 5/16	10
M1365P	13	1/2	65	2 5/16	10
M1465P	14	9/16	65	2 5/16	10
M06100P	6	1/4	100	4	10
M08100P	8	5/16	100	4	10
M010100P	10	3/8	100	4	10

