


TAPPERS

DRILLS & TAPPERS



UT-66B-07

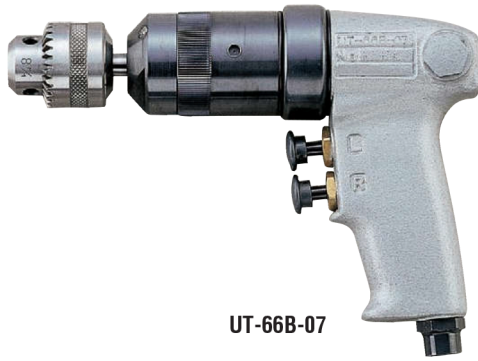


UT-60-04




UT-60S-07

Double-Trigger Handle

UT-66 series reversible drills have the double trigger handle for quick and frequent switchover of rotation.



"Push-Pull" Auto Reversing Clutches



Power is controlled by the built-in Air Regulator located on the handle.
UT-60-07
UT-60-04

OPTION

Size up of Chuck is possible.



923-060-0



923-053-0



682-732-0



678-732-7

Chuck Adaptor

Name	Part Number
φ 13 Chuck	923-060-0
φ 13 Taper Adaptor	682-732-0
φ 10 Chuck	923-053-0
φ 10 Taper Adaptor	678-732-7

*Tapping capacity is up to nominal Standard chuck size.

SPECIFICATIONS

Recommended Air Pressure : 0.6MPa (85psi)

Model	Tapping Capacity		Free Speed (about) min ⁻¹	Overall Length (about)		Weight with Chuck (about)		From Center to Outside (about)		Average Air Consumption		Code
	mm	in		mm	in	kg	lb	mm	in	m ³ /min	ft ³ /min	
UT-66B-15	6	1/4	1500	183	7 7/32	1.32	2.90	25.0	31/32	0.4	14.4	68102
UT-66B-07	8	5/16	800	196	7 23/32	1.42	3.12	25.0	31/32	0.4	14.4	68132
UT-60-07	8	5/16	680	244	9 39/64	1.80	3.96	22.5	57/64	0.5	18.0	67852
UT-60-04	8	5/16	400	244	9 39/64	1.80	3.96	22.5	57/64	0.5	18.0	67872
UT-60S-07	8	5/16	680	316	12 7/16	1.65	3.63	22.5	57/64	0.5	18.0	68022
UT-60S-04	8	5/16	400	316	12 7/16	1.65	3.63	22.5	57/64	0.5	18.0	68002

Air Inlet Thread : NPT1/4" for UT-66B-15-UT-60S-04 Air Hose Size : 9.5mm (3/8") for UT-66B-15-UT-60S-04
Nominal Chuck Size : 8mm (5/16") for UT-66B-07-UT-60S-04