


Air Drill Gear Type

氣動鑽:齒輪式



OP-510H 3/8"
Rear exhaust
後排氣

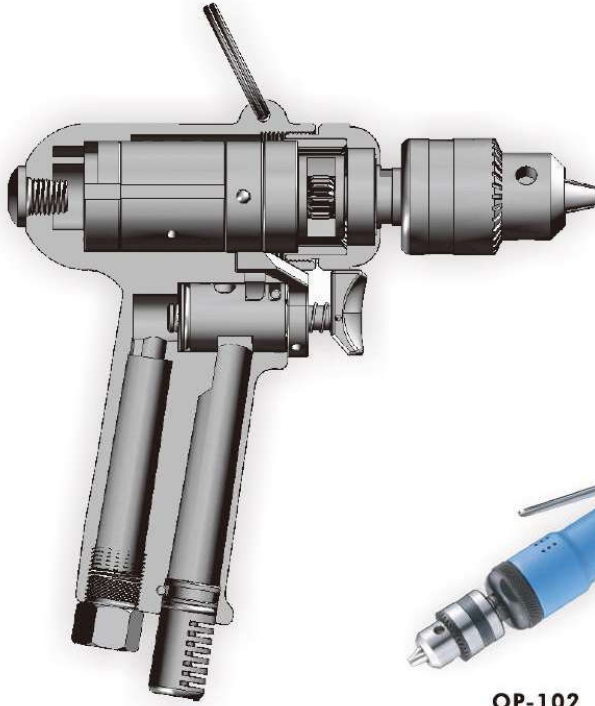

OP-102 3/8"
Side exhaust
側排氣



OP-D5128 1/4"
Handle exhaust
下排氣



OP-101 3/8"
Handle exhaust
下排氣



OP-401LN 3/8"
Handle exhaust
下排氣



OP-601C 3/8"
Handle exhaust
下排氣

SPECIFICATION(air pressure at 90psi、6.2bar、6.3kg/cm²)

MODEL 型號	Chuck Size 夾頭尺寸		Stall Torque 停止扭矩		Free Speed 無負荷轉速	Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭	Net Weight 重量		Reversible 正反轉	Sound Level 噪音值
	mm	inch	Nm	ft-lb	rpm	l/min	cfm	mm	inch	P.T	kg	lb		dB(A)
OP-510H	10	3/8			1500	240	8.5	210	8.27	1/4	1.4	3.09	○	98
OP-102	10	3/8	2.1	1.5	2200	141	5	210	8.27	1/4	0.84	1.85	○	88
OP-D5128	6	1/4	2.6	1.9	2850	198	7	147	5.79	1/4	0.82	1.81	○	80
OP-101	10	3/8	2.1	1.5	2500	226	8	185	7.28	1/4	1.07	2.36	○	88
OP-401LN	10	3/8	2.1	1.5	2100	198	7	175	6.89	1/4	1.05	2.31	○	88
OP-601C	10	3/8	2.1	1.5	2600	184	6.5	170	6.69	1/4	1.02	2.25	○	82

Air Drill Gear Type

氣動鑽:齒輪式



OP-101GA 1/2"
Handle exhaust
下排氣



OP-402LN 1/2"
Handle exhaust
下排氣



OP-601CG 1/2"
Handle exhaust
下排氣



OP-D84140 3/8" Composite handle
OP-D8448 3/8" Handle exhaust
OP-D8432 3/8" 複合材料把手
OP-D8425 3/8" 下排氣



OP-D8410 1/2" Composite handle
OP-D8406 1/2" Handle exhaust
複合材料把手
下排氣



OP-D6116 3/8"
Handle exhaust
下排氣



OP-D95185 1/4"
OP-D9560 1/4"
OP-D9540 1/4"
OP-D9531 3/8"
OP-D9525 1/2"
Handle exhaust
下排氣



OP-D9519 3/8"
OP-D9512 1/2"
OP-D9506 1/2"
Handle exhaust
下排氣

SPECIFICATION(air pressure at 90psi、6.2bar、6.3kg/cm²)

MODEL 型號	Chuck Size 夾頭尺寸		Stall Torque 停止扭矩		Free Speed 無負荷轉速	Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭	Net Weight 重量		Reversible 正反轉	Sound Level 噪音值
	mm	inch	Nm	ft-lb	rpm	l/min	cfm	mm	inch	P.T	kg	lb		dB(A)
OP-101GA	13	1/2	7.7	5.6	700	226	8	220	8.66	1/4	1.55	3.41	○	88
OP-402LN	13	1/2	7.7	5.6	650	226	8	215	8.46	1/4	1.54	3.74	○	88
OP-601CG	13	1/2	7.7	5.6	700	212	7.5	205	8.07	1/4	1.49	3.28	○	82
OP-D84140	10	3/8	1	0.7	14000	283	10	185	7.28	1/4	1.06	2.34	○	88
OP-D8448	10	3/8	3.14	2.3	4800	283	10	185	7.28	1/4	1.06	2.34	○	88
OP-D8432	10	3/8	4.7	3.5	3200	283	10	185	7.28	1/4	1.06	2.34	○	88
OP-D8425	10	3/8	6	4.4	2500	283	10	185	7.28	1/4	1.06	2.34	○	88
OP-D8410	13	1/2	14.9	10.9	1000	283	10	230	9.05	1/4	1.62	3.57	○	88
OP-D8406	13	1/2	22.5	16.6	660	283	10	230	9.05	1/4	1.62	3.57	○	88
OP-D6116	10	3/8	6	4.4	1650	240	8.5	170	6.69	1/4	1.45	3.19	○	82
OP-D95185	6	1/4	1.4	1	18000	367	13	176	6.93	1/4	1.15	2.53	X	87
OP-D9560	6	1/4	4.4	3.2	6000	367	13	176	6.93	1/4	1.15	2.53	X	87
OP-D9540	6	1/4	6.6	4.8	4000	367	13	176	6.93	1/4	1.15	2.53	X	87
OP-D9531	10	3/8	8.4	6.2	3150	367	13	185	7.28	1/4	1.23	2.70	X	87
OP-D9525	13	1/2	10.4	7.6	2500	367	13	198	7.8	1/4	1.37	3.02	X	87
OP-D9519	10	3/8	13.8	10.2	1900	367	13	212	8.35	1/4	1.65	3.63	X	87
OP-D9512	13	1/2	20.9	15.4	1250	367	13	225	8.86	1/4	1.85	4.07	X	87
OP-D9506	13	1/2	39.9	29.4	650	367	13	225	8.86	1/4	1.85	4.07	X	87

Air Drill Gear Type

氣動鑽：齒輪式

Outside trigger
外板機

Inside trigger
內板機



OP-D16-G1 5/8"
OP-D19-G1 3/4"

Side exhaust
側排氣

- Outside trigger : OP-D16-G1
OP-D19-G1
- Inside trigger : OP-D16-G1Z
OP-D19-G1Z

- 外板機 : OP-D16-G1
OP-D19-G1
- 內板機 : OP-D16-G1Z
OP-D19-G1Z

OP-D165111 5/8"

Composite handle
Handle exhaust
複合材料把手
下排氣

Outside trigger
外板機

Inside trigger
內板機



OP-DMT21110

Side exhaust
側排氣

- Outside trigger : OP-DMT2110
- Inside trigger : OP-DMT2110Z
- 外板機 : OP-DMT2110
- 內板機 : OP-DMT2110Z

OP-DMT25111


Composite handle
Handle exhaust
複合材料把手
下排氣

SPECIFICATION (air pressure at 90psi、6.2bar、6.3kg/cm²)

MODEL 型號	Chuck Size 夾頭尺寸		Free Speed 無負荷轉速	Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭	Net Weight 重量		Reversible 正反轉	Sound Level 噪音值
	mm	inch		l/min	cfm	mm	inch		P.T	kg		
OP-D16-G1	16	5/8	1000	424	15	420	16.54	3/8	6.34	13.98	○	102
OP-D16-G1Z	16	5/8	1000	424	15	420	16.54	3/8	6.34	13.98	○	102
OP-D19-G1	19	3/4	1000	424	15	437	17.2	3/8	7.04	15.52	○	102
OP-D19-G1Z	19	3/4	1000	424	15	437	17.2	3/8	7.04	15.52	○	102
OP-DMT21110	MT2		1000	424	15	445	17.5	3/8	6.12	13.5	○	102
OP-DMT21110Z	MT2		1000	424	15	445	17.5	3/8	6.12	13.5	○	102
OP-D165111	16	5/8	1100	452	16	305	12	3/8	5.86	12.92	○	87
OP-DMT25111	MT2		1100	452	16	330	13	3/8	5.6	12.34	○	87

Air Drill Gear Type

氣動鑽：齒輪式



OP-401C
Handle exhaust
下排氣



OP-7P
Handle exhaust
下排氣



OP-8P
Handle exhaust
下排氣



OP-D105117
Handle exhaust
下排氣



OP-D135106
Handle exhaust
下排氣

SPECIFICATION (air pressure at 90psi、6.2bar、6.3kg/cm²)

MODEL 型號	Chuck Size 夾頭尺寸		Free Speed 無負荷轉速 rpm	Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭 P.T	Net Weight 重量		Reversible 正反轉	Sound Level 噪音值 dB(A)
	mm	inch		l/min	cfm	mm	inch		kg	lb		
OP-401C	6.5	1/4	2700	170	6	140	5.51	1/4	0.64	1.14	X	88
OP-7P	10	3/8	1800	325	11.5	175	6.89	1/4	1.2	2.64	○	90
OP-8P	10	3/8	1400	226	8	205	8.07	1/4	1.47	3.24	○	90
OP-D105117	10	3/8	1700	367	13	180	7.08	1/4	1.15	2.53	○	88
OP-D135106	13	1/2	600	367	13	205	8.07	1/4	1.7	3.74	○	88