

Air Chipping Hammer

重型氣動鑿鉗




SPECIFICATION (air pressure at 90psi \ 6.2bar \ 6.3kg/cm²)

MODEL 型號	Blows Per Min 衝擊數 (B.P.M.)	Chisel Shank 柄徑		Piston Diameter 活塞直徑		Piston Stroke 活塞行程		Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭		Net Weight 重量	
		R/H(mm)	R/H(inch)	mm	mm	mm	inch	l/min	cfm	mm	inch	PT	kg	lb	
OP-6202R	2300	17.2	0.68	∅ 28.5x67	73	2.9	141	5	373	14.69	3/8	7.8	17.2		
OP-6202H	2300	14.5	0.58	∅ 28.5x67	73	2.9	141	5	373	14.69	3/8	7.8	17.2		
OP-6203R	1900	17.2	0.68	∅ 28.5x73.5	113	4.4	158	5.6	419	16.5	3/8	8.5	18.7		
OP-6203H	1900	14.5	0.58	∅ 28.5x73.5	113	4.4	158	5.6	419	16.5	3/8	8.5	18.7		
OP-6204R	1700	17.2	0.68	∅ 28.5x76.5	136	5.3	166	5.9	445	17.52	3/8	8.8	19.4		
OP-6204H	1700	14.5	0.58	∅ 28.5x76.5	136	5.3	166	5.9	445	17.52	3/8	8.8	19.4		

R=Round, H=Hex

Concrete Breaker

破碎機

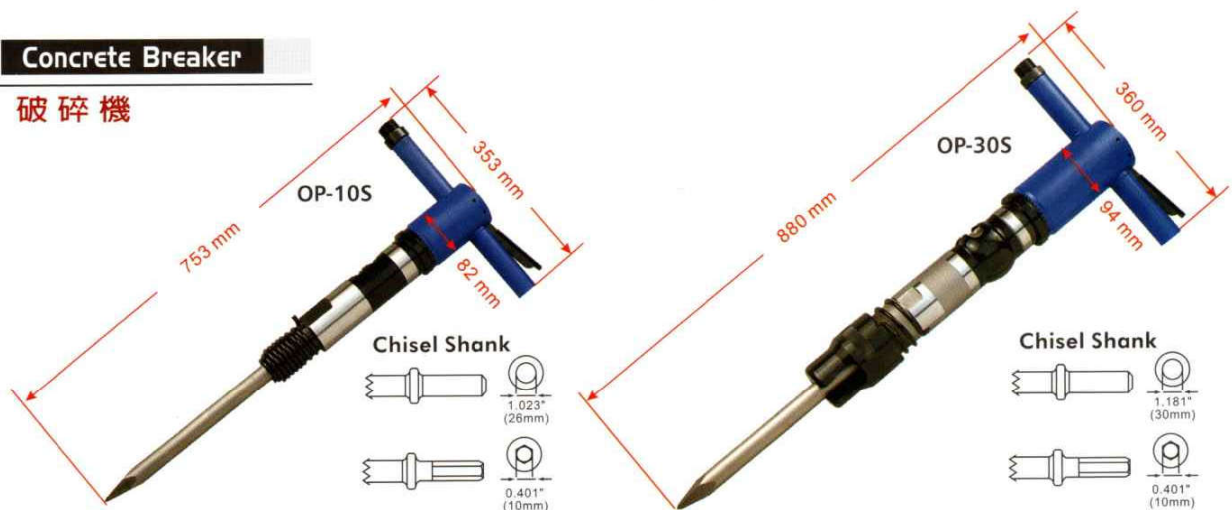

SPECIFICATION (air pressure at 90psi \ 6.2bar \ 6.3kg/cm²)

MODEL 型號	Blows Per Min 衝擊數 (B.P.M.)	Chisel Shank 柄徑		Piston Diameter 活塞直徑		Piston Stroke 活塞行程		Hose Int. 風管尺寸	Avg. Air Consumption 耗氣量		Overall Length 全長		Net Weight 重量	
		mm	inch	mm	mm	mm	inch	inch	l/min	cfm	mm	inch	kg	lb
OP-10S	1300	26	1.023	∅ 35x90	125	4.9	1/2	989	35	753	29.65	14.1	31.1	
OP-30S	1000	30	1.181	∅ 40x130	218	8.6	3/4	1186	42	880	34.65	24.6	54.2	

Auto Repair Pneumatic Tools 汽車修護工具

Vibration-Damped Air Hammer

減震氣動鎚



OP-3190R
OP-3190H

Air Chipping Hammer

氣動鑿鎚



OP-1SR 1"
OP-1SH 1"




OP-3SR 3"
OP-3SH 3"



620QC
Oval collar
retainer



3400
Quick change
retainer

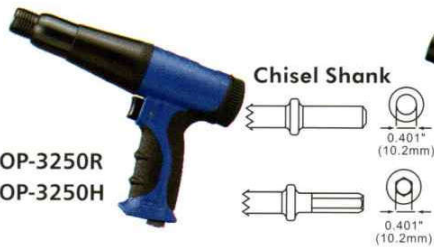

OP-3250R
OP-3250H

Chisel Shank



OP-2SR 2"
OP-2SH 2"



OP-4SR 4"
OP-4SH 4"

Chisel Shank



SPECIFICATION(air pressure at 90psi \ 6.2bar \ 6.3kg/cm²)

MODEL 型號	Blows Per Min 衝擊數	Chisel Shank 柄徑		Piston Diameter 活塞直徑	Piston Stroke 活塞行徑		Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭	Net Weight 重量	
	(B.P.M.)	R/H(mm)	R/H(inch)	mm	mm	inch	l/min	cfm	mm	inch	PT	kg	lb
OP-3190R/H	3000	10.2/10.2	0.401/0.401	∅19x48	63	2.5	220	7.8	215	8.47	1/4	1.6	3.5
OP-3250R/H	2100	10.2/10.2	0.401/0.401	∅19x68	87	3.4	243	8.6	260	10.24	1/4	1.9	4.2
OP-1SR/H	2500	17.2/14.5	0.68/0.58	∅28.5x67	61	2.4	283	10	383	15.1	3/8	7	15.4
OP-2SR/H	2300	17.2/14.5	0.68/0.58	∅28.5x76	75	3	566	20	397	15.6	3/8	7.3	16.1
OP-3SR/H	2000	17.2/14.5	0.68/0.58	∅28.5x73.5	118	4.6	623	22	450	17.72	3/8	8	17.6
OP-4SR/H	1600	17.2/14.5	0.68/0.58	∅28.5x76.5	141	5.5	680	24	470	18.5	3/8	8.3	18.26

R=Round, H= Hex

Fastener Remover

氣動卸除器



OP-CP1106



OP-CP1240

SPECIFICATION(air pressure at 90psi \ 6.2bar \ 6.3kg/cm²)

MODEL 型號	Blows Per Min 衝擊數	Air Consumption 耗氣量		Overall Length 全長		Air Inlet 入氣接頭	Net Weight 重量	
	(B.P.M.)	l/min	cfm	mm	inch	PT	kg	lb
OP-CP1106	633	47.01	1.67	240	9.45	1/4	0.32	0.7
OP-CP1240	4000	548	19.4	265	10.43	1/4	2.0	4.4