




10.8V/14.4V Precision Shut-off Impact Driver & Wrench

Cordless Impact Driver		Cordless Impact Wrench
EYFLA7A	EYFLA8A	EYFLA8C
 <p>10.8V Brushless Motor</p> <p>3.0Ah 2.0Ah</p>	 <p>10.8V Brushless Motor</p> <p>3.0Ah 2.0Ah</p>	 <p>10.8V Brushless Motor</p> <p>3.0Ah 2.0Ah</p>
*Battery pack is not included		*Battery pack is not included



Chuck size	Single-ended 9mm Double-ended 12mm	Single-ended 9mm Double-ended 12mm	<input type="checkbox"/> 9.5mm Square Drive Retainer ring and Pin-hole type
Application	Screw M5•M6 (Normal—Tensile bolt) M8 bolt (Normal bolt)	M6 bolt (Tensile bolt) M8 bolt (Normal—Tensile bolt)	M6 bolt (Tensile bolt) M8 bolt (Normal—Tensile bolt)
Maximum torque (F mode, fastening 3 sec.)	approx. 35 N•m (M10 bolt)	approx. 80 N•m (M14 bolt)	approx. 80 N•m (M14 bolt)
Shut-off range	approx. 3—22 N•m	approx. 6—30 N•m	approx. 6—30 N•m
Torque setting	40 stage + F (without torque setting mode)		
Snug torque detection mode setting	7 stages (L1 ~ L7)		
No load speed (unit : rpm)	stage1: 0~ 950, stage2 : 0~1250 stage3: 0~1450, stage4~8: 0~1550 stage9~40•F: 0~2300	stage1: 0~1300, stage2 : 0~1450 stage3: 0~1550, stage4~40•F: 0~2300	
Impact per minute	stage1: 0~1800, stage2 : 0~2250 stage3: 0~2500, stage4~8: 0~2950 stage9~40•F: 0~3600	stage1: 0~2400, stage2 : 0~2500 stage3: 0~2800, stage4~40•F: 0~3300	
Weight*¹ (inc. battery)	EYFB30B	approx. 1.3kg	approx. 1.35kg
	EYFB32B	approx. 1.15kg	approx. 1.15kg
	EYFB43B•EYFB42B	—	—
	EYFB41B	—	—
Size	Length	153mm	153mm
	Height	249mm (EYFB30B), 231mm (EYFB32B)	
	Width	approx. 59mm (Width of battery pack: approx. 75mm)	
Vibration	5.2m/s ²	7.0m/s ²	6.3m/s ²
Function	LED light	● (ON/OFF switch, Light turns off after five minutes automatically)	
	Tightening confirmation lamp	● (OK fastening: Green lamp, NOK fastening: Red lamp)	
	Battery indication lamp	● (3 stages)	
	Auto battery shutdown	●	
	Advanced fastening features	● (For details of the feature, Please refer to page 6)	
	Tool hanger	●	
Work capacity / Fastening speed	<M6: 10 N•m, Stage: 22> (EYFB30B) approx. 1200 pcs/pack approx. 0.7 sec/1pcs (EYFB32B) approx. 800 pcs/pack approx. 0.7 sec/1pcs	<M8: 23 N•m, Stage: 22> (EYFB30B) approx. 800 pcs/pack approx. 0.8 sec/1pcs (EYFB32B) approx. 540 pcs/pack approx. 0.8 sec/1pcs	<M8: 23 N•m, Stage: 22> (EYFB30B) approx. 800 pcs/pack approx. 0.8 sec/1pcs (EYFB32B) approx. 540 pcs/pack approx. 0.8 sec/1pcs
Charging time	(Battery pack EYFB30B, Charger EY0L82B) Usable charge: approx. 35 min. Full charge: approx. 45 min (Battery Pack EYFB32B, Charger EY0L82B) Usable Charge: approx. 35 min. Full Charge: approx. 40 min		

Cordless Impact Wrench

EYFLA9C

10.8V

Brushless Motor



3.0Ah
2.0Ah

*Battery pack is not included

EYFMA2C

14.4V

Brushless Motor



4.2Ah
4.0Ah
2.0Ah

*Battery pack is not included

□ 12.7mm Square Drive Retainer ring and Pin-hole type

□ 12.7mm Square Drive Retainer ring and Pin-hole type

M8 bolt (Tensile bolt)
M10 bolt (Normal bolt)

M10 bolt (Tensile bolt)
M12 bolt (Normal-Tensile bolt)
M14 bolt (Normal bolt)

approx. 120 N·m (M14 Tensile bolt)

approx. 185 N·m (M16 Tensile bolt)

approx. 20–60 N·m

approx. 25–120 N·m

40 stages + F (without torque setting mode)

7 stages (L1 ~ L7)

0 ~ 2300

0 ~ 2300

0 ~ 2800

0 ~ 2900

approx. 1.45kg

approx. 1.3kg

approx. 1.6kg

approx. 1.4kg

172mm

250mm (EYFB30B), 232mm (EYFB32B) 250mm (EYFB43B·EYFB42B), 232mm (EYFB41B)

approx. 59mm (Width of battery pack: approx. 75mm)

5.1m/s²

6.9m/s²

● (ON/OFF switch, Light turns off after five minutes automatically)

● (OK fastening: Green lamp, NOK fastening: Red lamp)

● (3 stages)

● (For details of the feature, Please refer to page 6)


<M10: 43 N·m, Stage: 23>
(EYFB30B)
approx. 400 pcs/pack
approx. 0.8 sec/1pcs
(EYFB32B)
approx. 260 pcs/pack
approx. 0.8 sec/1pcs

<M12: 71 N·m, Stage: 22>
(EYFB43B)
approx. 510 pcs/pack, approx. 0.8 sec/1pcs
(EYFB42B)
approx. 600 pcs/pack, approx. 0.8 sec/1pcs
(EYFB41B)
approx. 270 pcs/pack, approx. 0.8 sec/1pcs

(Battery pack EYFB30B, Charger EYOL82B)
Usable charge: approx. 35 min.
Full charge: approx. 45 min
(Battery Pack EYFB32B, Charger EYOL82B)
Usable Charge: approx. 35 min.
Full Charge: approx. 40 min

(Battery pack EYFB43B, Charger EYOL82B)
Usable Charge: approx. 45 min.
Full Charge: approx. 60 min
(Battery pack EYFB42B, Charger EYOL82B)
Usable Charge: approx. 50 min.
Full Charge: approx. 60 min
(Battery Pack EYFB41B, Charger EYOL82B)
Usable Charge: approx. 35 min.
Full Charge: approx. 40 min

Tightening Torque Chart (for Reference Use)

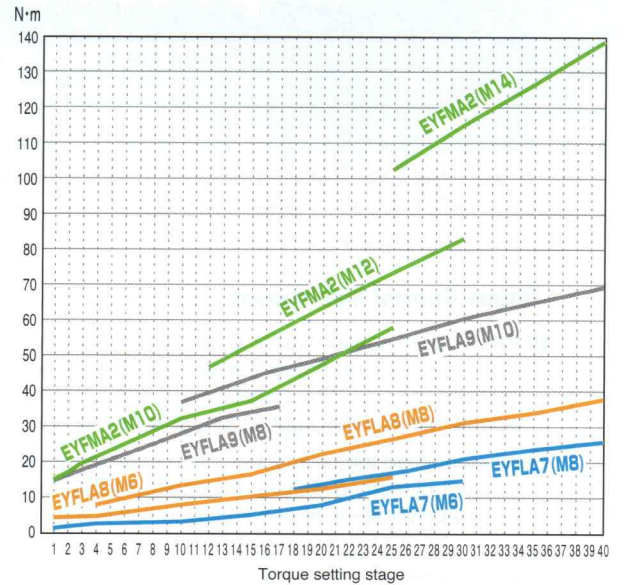

The values illustrated on this chart were measured under Panasonic measuring condition and are provided for reference purposes. Actual tightening torque varies with ambient conditions (the particular bolt being tightened, hardware being used, method of holding the bolt in place, etc.).

<Optional Accessory>

10.8V Li-Ion Battery Pack EYFB30B, EYFB32B

EYFB30B
(3.0Ah)



EYFB32B
(2.0Ah)

14.4V Li-Ion Battery Pack EYFB43B, EYFB42B, EYFB41B

EYFB43B
(4.0Ah)

EYFB42B
(4.2Ah)



EYFB41B
(2.0Ah)

Charger EYOL82B



Remote Control EYFA31B



Protector for Battery EYFA02-H (gray), EYFA03-H (gray), EYFA04-H (gray), EYFA06-H (gray)



EYFA02
(for EYFB30B)



EYFA03
(for EYFB32B)



EYFA04
(for EYFB42B
· EYFB43B)



EYFA06
(for EYFB41B)

Protector for Tool EYFA13-A (blue), -Y (yellow), -H (gray), -D (orange), -G (green)

