




Optional  
Ø5xØ8



Optional  
Ø5xØ8




**R-110N-1H-F**  
Single mixing type  
Pressure



Optional  
Ø5xØ8



**R-110N-1H-R**  
Single mixing type  
Pressure

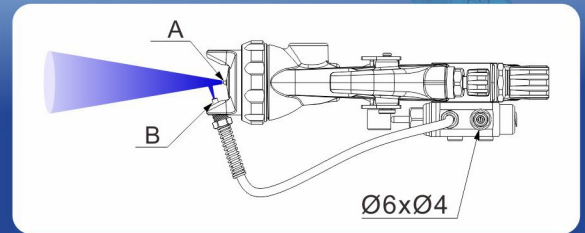

## Functions and Characteristics

- ◆ Paint mixing mode is external mixing. It can reduce the problem of solution solidification in the gun, pipe, container and tank.
- ◆ A Nozzle as the main nozzle for the main glue, B Nozzle as sub nozzle, used for curing agent.
- ◆ The coating channel adopts corrosion resistant design. The nozzle, needle and fluid coupler are made of stainless steel.
- ◆ According to the working environment, the main paint (A) feeding mode can be gravity type, suction type or pressure type. Secondary coating (B) feeding mode is pressure feeding.
- ◆ It is suitable for the fast bonding of water-based foam and sponge processing industry, such as the bonding of airplane and automobile seats, sofa cushions, mattress furniture, woodworking furniture, heat-insulating cotton materials, etc.

Model	Type of feed	The main fluid nozzle size(A)	Vice fluid nozzle size(B)	Air cap	Air pressure	Air consumption	Fluid output	Spray width ±10	Weight
		ømm( in)	ømm( in)		kg/cm <sup>2</sup> (Mpa)	l/min(cfm)	ml/min	mm(in)	g(lbs)
R-110N-1H-F	Pressure	0.8(0.031)	0.4(0.016) 0.5(0.020) 0.6(0.024)	F cap	2.0-3.0 (0.2-0.29)	210 (14.48)	100	150(5.9)	438 (0.97)
		1.0(0.039)					120	160(6.3)	
		1.3(0.051)					150	180(7.09)	
		1.5(0.059)					170	200(7.84)	
R-110N-1H-R	Pressure	0.8(0.031)	0.4(0.016) 0.5(0.020) 0.6(0.024)	R cap	2.0-3.0 (0.2-0.29)	150 (10.34)	80	Round 40-80 (1.57-3.15)	438 (0.97)
		1.0(0.039)					100		
		1.3(0.051)					130		
		1.5(0.059)					150		

◆ R110-1H-F/R Spray distance:200-250mm.Paint viscosity:20±1 seconds/RV-2. Coating Pressure:0.8kg/cm<sup>2</sup>. The main fluid intake: 1/4PF/NPF.Vice fluid intake:Ø6xØ4.Air intake: 1/4PF/NPF.