

URYU
Power
Tools


HANDHELD ELECTRIC NUTRUNNER

UEC3000II

System




We have a lineup
of the hand-held nutrunners
employed with compact
and high-performance servo motor

 **URYU SEISAKU, LTD.**
Osaka, Japan

Compact and high-performance servo motor employed
Pistol and angle types flexibly available for various applications


■ Tools

Pistol type



Model	Max. torque		Torque range		Speed	Overall length		Weight		Sq. drive
	Nm	ft-lbs	Nm	ft-lbs	rpm	mm	in	kg	lb	mm
UAN-015M50-P1	15	11.1	3.8-15	2.8-11.1	1190	218	8 37/64	1.1	2.43	9.5Sq
UAN-035M80-P1	35	25.8	8.8-35	6.5-25.8	778	242	9 17/32	1.37	3.02	9.5Sq

Angle type



Model	Max. torque		Torque range		Speed	Overall length		Weight		Sq. drive
	Nm	ft-lbs	Nm	ft-lbs	rpm	mm	in	kg	lb	mm
UAN-015M50-A1	15	11.1	3.8-15	2.8-11.1	1215	369	14 17/32	1.6	3.53	9.5Sq
UAN-025M80-A1	25	18.4	6.3-25	4.6-18.4	1070	389	15 5/16	1.7	3.75	9.5Sq
UAN-040M80-A1	40	29.5	10-40	7.4-29.5	648	414	16 19/64	1.93	4.25	9.5Sq
UAN-060M80-A	60	44.3	15-60	11.1-44.3	446	414	16 19/64	1.95	4.3	12.7Sq
UAN-080M120-A	80	59.0	20-80	14.8-59	557	459.8	18 7/64	3	6.61	12.7Sq
UAN-130M120-A	130	95.9	32.5-130	24-95.9	316	484.8	19 3/32	3.3	7.28	12.7Sq
UAN-200M120-A	200	147.5	50-200	36.9-147.5	206	512.3	20 11/64	3.7	8.16	15.9Sq
UAN-300M120-A	300	221.3	75-300	55.3-221.3	144	586	23 5/64	6.2	13.67	19.0Sq

*Please contact us if you need other tool type or model.

Various fastening methods selectable
Communication with the external PLC through optional interfaces

■ Controller

Model	UEC-B024A
Corresponding motor model	M50, M80, M120
Power supply	Single phase AC100 - 240V ±10%
Power consumption rating	120W
Max. moment current (motor max. output)	19A
Dimensions	326x167x315 mm (12 53/64x6 37/64x12 13/32 in)
Weight	8.5 kgs (18.7 lb)

■ Tool cables


Model	Length
C15-F7-M5	5 meter (16 13/32 ft)
C15-F7-M10	10 meter (36 3/32 ft)
C15-F7-M15	15 meter (49 7/32 ft)



Tool cable



Front panel

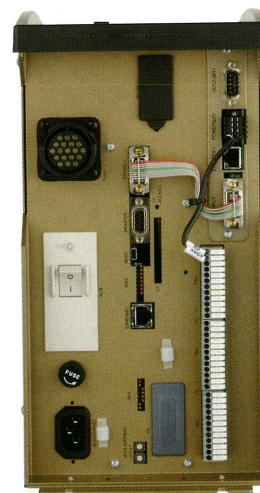

Rear panel

 **URYU SEISAKU, LTD.**

P.O.Box 7, Higashinari, Osaka, Japan
Telephone Nos +81-6-6973-9414-9415
Fax. No. +81-6-6972-0346
E-Mail: uryuair@uryu.co.jp

Distributed by :